



- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

## Instruction Manual



### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



| Product Specifications |              | 15W  |                                | 25W                           |                                |
|------------------------|--------------|--|--------------------------------|-------------------------------|--------------------------------|
| Input Voltage          |              | 100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac<br>(Subject to the input voltage on nameplate) |                                |                               |                                |
| Power Frequency        |              | 50 / 60 Hz   |                                |                               |                                |
| Outlook Dimensions     |              | Ø135×500mm<br>(Ø5.31"×19.69")  | Ø135×1000mm<br>(Ø5.31"×39.37") | Ø135×500mm<br>(Ø5.31"×19.69") | Ø135×1000mm<br>(Ø5.31"×39.37") |
| Net Weight             |              | 3.8±0.3kg<br>(8.38±0.66Lbs)  | 5.4±0.3kg<br>(11.9±0.66Lbs)    | 3.8±0.3kg<br>(8.38±0.66lbs)   | 5.4±0.3kg<br>(11.9±0.66Lbs)    |
| Working Temperature    | Conventional | -20°C to + 45°C(-4°F to +113°F)  |                                |                               |                                |
|                        | With PIR     | -20°C to + 40°C(-4°F to +104°F)  |                                |                               |                                |
|                        | DALI         | -30°C to + 50°C(-22°F to +122°F)   |                                |                               |                                |
| Storing Temperature    |              | -40°C to + 70°C(-40°F to +158°F)   |                                |                               |                                |

### Dimmable

|             |              |    |             |    |             |    |        |    |       |    |        |
|-------------|--------------|----|-------------|----|-------------|----|--------|----|-------|----|--------|
| DIM+/DA1    | purple       | or | purple      | or | blue        | or | brown  | or | black | or | red    |
| DIM-/DA2    | gray         |    | pink        |    | white       |    | blue   |    | gray  |    | orange |
| DIM+/DA1    | purple       |    | purple      |    | purple      |    | purple |    |       |    |        |
| DIM-/DA2    | gray         |    | pink        |    | gray        |    | pink   |    |       |    |        |
| Aux 12Vdc + | pink         |    | black/white |    | black/white |    | red    |    |       |    |        |
| DIM+/DA1    | purple       |    | purple      |    | purple      |    | purple |    |       |    |        |
| DIM-/DA2    | gray         |    | pink        |    | gray        |    | pink   |    |       |    |        |
| Aux 12Vdc + | pink         |    | black/white |    | black/white |    | red    |    |       |    |        |
| Aux 12Vdc - | black/white  |    | blue/white  |    | orange      |    |        |    |       |    |        |
| L           | brown        |    | black       |    |             |    |        |    |       |    |        |
| N           | blue         |    | white       |    |             |    |        |    |       |    |        |
| ⓪ GND       | yellow/green |    | green       |    |             |    |        |    |       |    |        |



Warning! do not wire dim cord to high voltage, or dim function will fail.


- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

| Packing List  |                     |      |
|---|---------------------|------|
|  | Base plate template | 1PC  |
|  | Screw fixing plate  | 1PC  |
|  | Screw M5*16         | 4PCS |
|  | Screw M6            | 3PCS |
|  | Nut M6              | 3PCS |



Physical Dimensions(mm/inch)

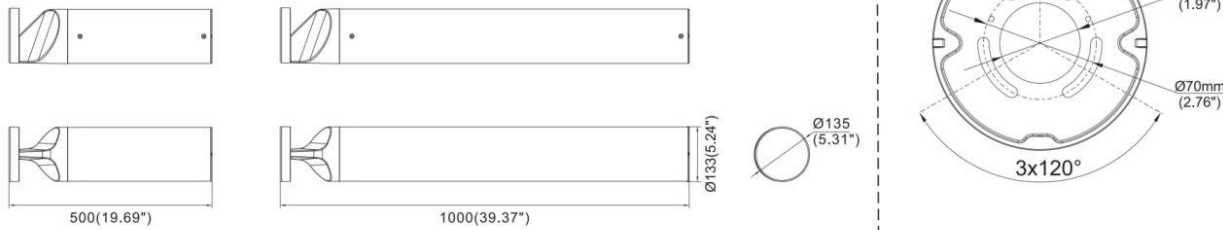

Installation

