




AQUILA II

|              |  |
|--------------|--|
| Item code    | 86.I0018.3461.02   |
| Product type | Outdoor  |
| Category     | Floodlights  |
| Family       | AQUILA II  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>SDCM<br/>3</div></div> <div><div></div><div>Driver<br/>INCL.</div><div>On<br/>Off</div><div></div><div></div></div> <div><div>IP<br/>66</div><div>CRI<br/>70</div><div>IK<br/>08</div><div>50000h<br/>L70B50</div></div> |

Scheme

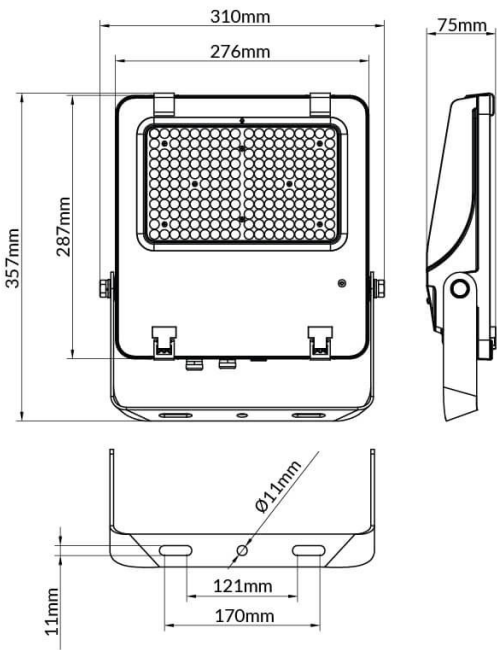

|                            |                |
|----------------------------|----------------|
| Product                    |                |
| Real power (W)             | 150            |
| Real luminous flux (Lm)    | 23250          |
| Luminous efficiency (Lm/W) | 155            |
| Beam angle (°)             | 26x60° tilt10° |
| Life time (h)              | 50000h L70B50  |
| IP                         | 66             |
| Control gear               | ON-OFF         |
| Colour temperature (K)     | 4000           |
| Colour consistency (SDCM)  | SDCM5          |
| CRI                        | ≥70            |
| IK                         | 08             |