

Precautions

Normal Operation: The green LED indicator stays on when connected to mains supply. The indicator will turn off when the mains supply fails.

Battery: LiFePO4 rechargeable battery pack. Battery should be replaced when it reaches the end of its lifetime. To avoid damage to the luminiare and ensure its performance, the battery should be replaced with same type.

Test Switch: Press the test button, LED indicator will turn off and the luminaire will be powered by the battery pack. The light source is non-replaceable. When the light source reaches the end of its lifetime, the whole luminaire shall be replaced.

Installation Procedure

WARNING


1.Switch off before installation or maintenance.
2.Switch on only after complete installation and examination of the circuit.
3.Professional electrician for installation and maintenance only.
4.This luminaire is not intended for use in high-risk task area lighting.



Read instructions and check you have all the tools and accessories to complete the installation correctly.

Recessed Mount


1. Take off the battery cover and connect the battery.




2. Take off the terminal cover.




3. AC Power supply wiring, brown wire connects to L, blue wire connects N.




DALI Wiring




4. Fix the luminaire into ceiling.



5. Switch on, the green LED indicator will light up.



Surface Mount

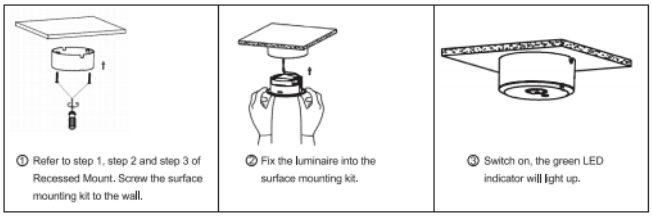

① Refer to step 1, step 2 and step 3 of Recessed Mount. Screw the surface mounting kit to the wall.

② Fix the luminaire into the surface mounting kit.


③ Switch on, the green LED indicator will light up.

Change Lens



Photometric Data

Oval lens for pathway application



Mounting height				
3W	Spacing (C0)		Spacing (C90)	
2.5m	2.68m	5.7m	10m	21m
3.0m	2.8m	6.5m	10.5m	24m
3.5m	2.9m	7.3m	11.2m	25m
6W	Spacing (C0)		Spacing (C90)	
2.5m	3.1m	6.5m	11.2m	22.6m
3.0m	3.4m	7.2m	12.3m	25.3m
3.5m	3.5m	7.8m	13.2m	28m