












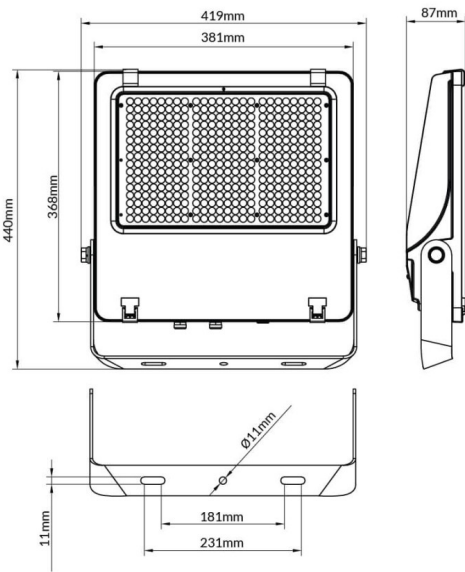




AQUILA II

Item code	86.I0018.5463.02
Product type	Outdoor
Category	Floodlights
Family	AQUILA II
Pictograms	<div><div> 50 60 Hz</div><div> 220 240 V</div><div> 850°</div><div> SDCM 3</div></div> <div><div> CE</div><div> Driver INCL.</div><div> DALI</div><div></div><div></div></div> <div><div> IP 66</div><div> CRI 70</div><div> IK 08</div><div> 50000h L70B50</div></div>

Scheme



Product	
Real power (W)	240
Real luminous flux (Lm)	38400
Luminous efficiency (Lm/W)	160
Beam angle (°)	26x60° tilt10°
Life time (h)	50000h L70B50
IP	66
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM5
CRI	≥70
IK	08