


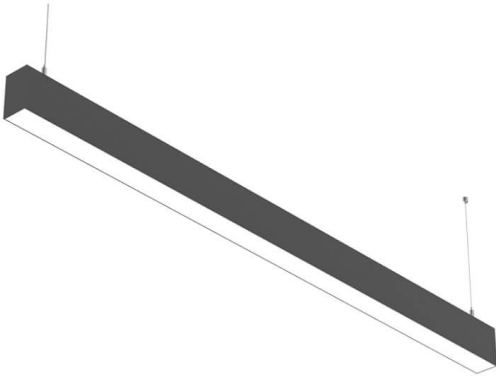


SLINE

|              |                                                                                                                                                                                                                   |  |  |  |  |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code    | 86.L001.3392.01                                                                                                                                                                                                   |  |  |  |  |
| Product type | Indoor                                                                                                                                                                                                            |  |  |  |  |
| Category     | Linear Systems                                                                                                                                                                                                    |  |  |  |  |
| Family       | SLINE                                                                                                                                                                                                             |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div><br/>1-10V</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |  |  |  |  |

Dimensions

Product dimensions (mm) 50x75X1800mm

Scheme



|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 60            |
| Real luminous flux (Lm)    | 5400          |
| Luminous efficiency (Lm/W) | 90            |
| Beam angle (°)             | 77            |
| Life time (h)              | 50000h L80B10 |
| IP                         | 20            |
| U. G. R                    | 19            |
| Control gear               | 0-10V Dim     |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 80            |