



- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

## LED High Bay Light

### Installation Instructions



#### Physical Dimensions(Unit: mm/inch)

100W/150W/200W




| Product Specifications    | 100W   | 150W | 200W                                |
|---------------------------|--|------|-------------------------------------|
| Input Voltage             | 100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC<br>(Subject to the input voltage on nameplate) |      |                                     |
| Power Frequency           | 50 / 60 Hz   |      |                                     |
| Outlook Dimensions        | Ø290x167mm(Ø11.41"x6.57")  |      |                                     |
| Luminaire Net Weight(±6%) | 1.9kg(4.19Lbs)   |      |                                     |
| Working Temperature       | -30°C to +50°C(-22°F to +122°F)  |      | -30°C to +45°C<br>(-22°F to +113°F) |
| Storing Temperature       | -40°C to +70°C(-40°F to +158°F)  |      |                                     |

\* Please subject to actual product for accurate weight.

1

#### Power Selectable

Caution:  
Please power off the luminaire before adjusting the DIP switch.  
Please do not use metal tool to adjust the DIP switch.  
Please adjust the switch gently.



#### Power Selectable


| A       | B      | C      |
|---------|--------|--------|
| 100%    | 80%    | 60%    |
| A(100%) | B(80%) | C(60%) |
| 100W    | 80W    | 60W    |
| 150W    | 120W   | 90W    |
| 200W    | 160W   | 120W   |

\* The tolerance for power is ±10%

#### Sensor Mount



#### Suspension Mount

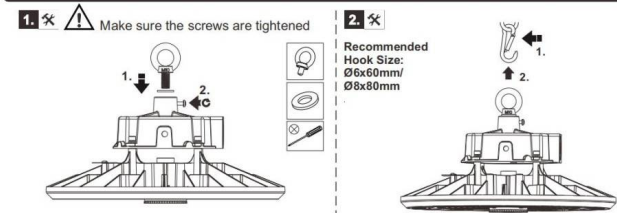

#### Ceiling Mount(Unit: mm/inch)



2



**PC Reflectors(Unit: mm/inch)**

