




MLINE

|              |                                                                                                                                                                                                                   |  |  |  |  |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code    | 86.L002.1492.01                                                                                                                                                                                                   |  |  |  |  |
| Product type | Indoor                                                                                                                                                                                                            |  |  |  |  |
| Category     | Linear Systems                                                                                                                                                                                                    |  |  |  |  |
| Family       | MLINE                                                                                                                                                                                                             |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div><br/>1-10V</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |  |  |  |  |


Dimensions

|                         |             |
|-------------------------|-------------|
| Product dimensions (mm) | 75x75X600mm |
|-------------------------|-------------|

Scheme



Photometry

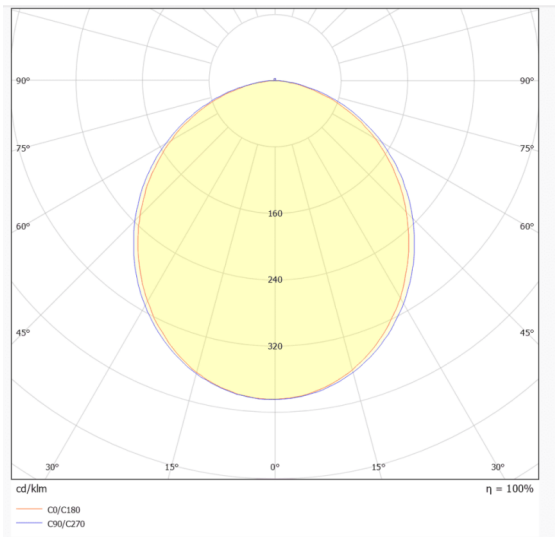

Product

|                            |               |
|----------------------------|---------------|
| Real power (W)             | 20            |
| Real luminous flux (Lm)    | 2000          |
| Luminous efficiency (Lm/W) | 100           |
| Beam angle (°)             | 120           |
| Life time (h)              | 50000h L80B10 |
| IP                         | 20            |
| U. G. R                    | 19            |
| Control gear               | 0-10V Dim     |
| Colour temperature (K)     | 4000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 80            |