




- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.




M3 include screw

1、Drill two holes in the wall or floor according to the hole size of the support, and put glue plugs or wood blocks into the holes.

2、Loosen the M3 machine screws, adjust the distance between the two supports, and then lock the screws

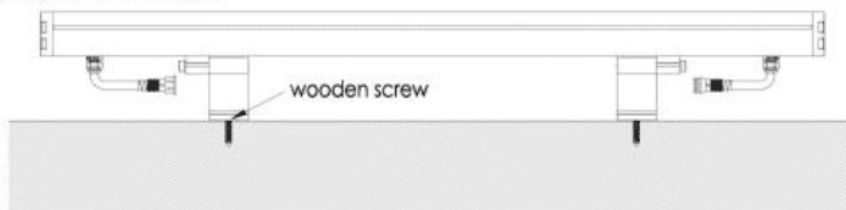

3、Attach the light fixture to the wall or floor with wood screws.

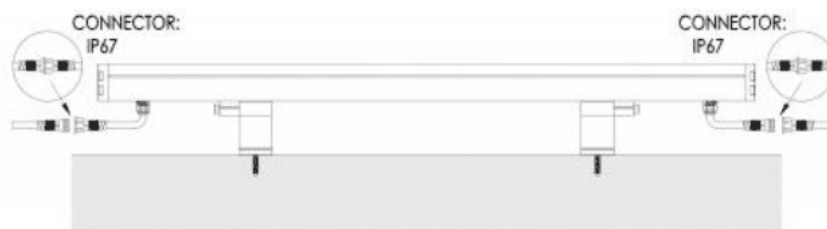

- 4、 Align the power cable connector with the power cable connector of the lamp and connect it to the card position.



- 5、 Loosen the M4 cup screw of the support, adjust the Angle of the lamp and then lock the screw