





## Instruction Manual


⑤

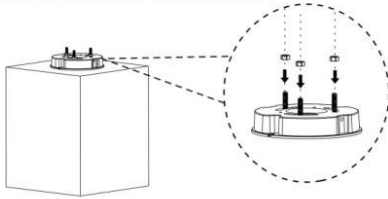

The direction of light should be on both side of notch. Please install bollard head properly.




⑥





⑦



⑧

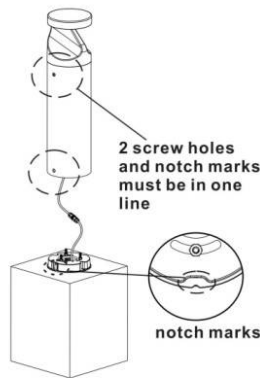


⑨

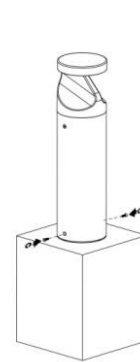

### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to + 45°C (-4°F to +113°F)			
	With PIR	-20°C to + 40°C (-4°F to +104°F)			
	DALI	-30°C to + 50°C (-22°F to +122°F)			
Storing Temperature		-40°C to + 70°C (-40°F to +158°F)			

### Dimmable

	DIM+/DA1	purple	or	purple	or	blue	or	brown	or	black	or	red
	DIM-/DA2	gray	or	pink	or	white	or	blue	or	gray	or	orange
	DIM+/DA1	purple	or	purple	or	purple	or	purple	or	purple	or	purple
	DIM-/DA2	gray	or	pink	or	gray	or	pink	or	pink	or	red
	Aux 12Vdc +	pink	or	black/white	or	black/white	or	black/white	or	red	or	red
	Aux 12Vdc -	black/white	or	black/white	or	black/white	or	black/white	or	black/white	or	black/white
	Aux 12Vdc +	pink	or	black/white	or	black/white	or	black/white	or	black/white	or	black/white
	Aux 12Vdc -	black/white	or	black/white	or	black/white	or	black/white	or	black/white	or	black/white
	L	brown	or	black	or	black	or	black	or	black	or	black
	N	blue	or	white	or	white	or	white	or	white	or	white
	⊙ GND	yellow/green	or	green	or	green	or	green	or	green	or	green
	DIM+/DA1	black	or	red	or	red	or	red	or	red	or	red
	DIM-/DA2	gray	or	orange	or	orange	or	orange	or	orange	or	orange
	DIM+/DA1	black	or	red	or	red	or	red	or	red	or	red
	DIM-/DA2	gray	or	orange	or	orange	or	orange	or	orange	or	orange
	DIM+/DA1	black	or	red	or	red	or	red	or	red	or	red

#### For type Y attachments:

if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.






The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Warning! do not wire dim cord to high voltage, or dim function will fail.



## Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS



0.5m



1m

## Physical Dimensions(mm/inch)




500(19.69")



1000(39.37")


Ø133(5.24")

Ø135  
(5.31")




## Installation


①



②

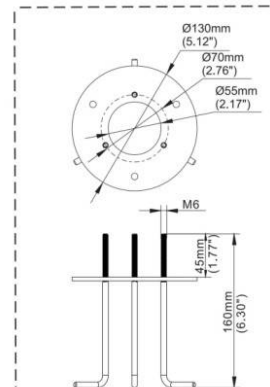

③



Hole Diameter:  
Ø30-55mm  
(Ø1.18"-2.17")

④

Suggested cement  
column size

