










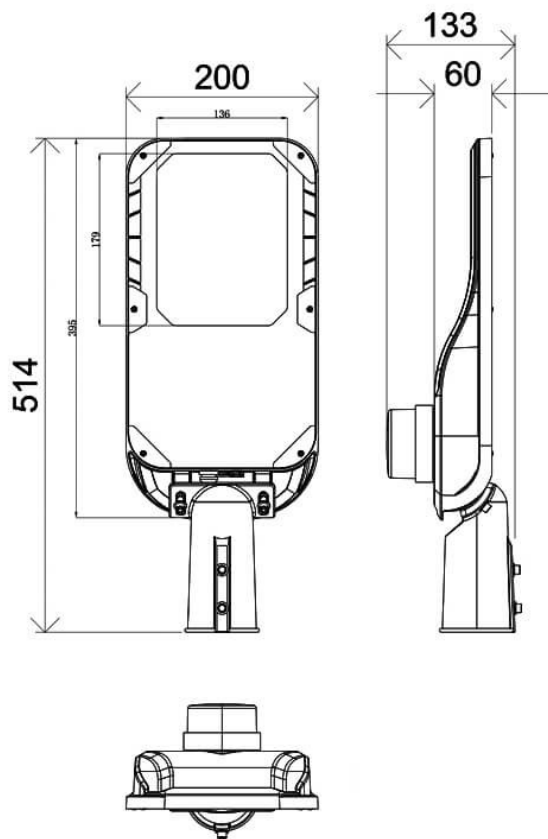


**Dimensions**

Product dimensions (mm)	220x515x85mm
-------------------------	--------------

**Scheme**



Vialight II

Item code	86.OS11.2473.03
Product type	Outdoor
Category	Street lights
Family	Vialight II
Pictograms	<div><div> 220 240 V</div><div> 850°</div><div> Driver INCL.</div><div></div><div></div><div> IP 66</div><div> CRI 70</div><div> SDCM 5</div><div> 50000h L70B10</div><div> IK 08</div></div>

Product	
Real power (W)	40
Real luminous flux (Lm)	6400
Luminous efficiency (Lm/W)	160
Beam angle (°)	T2 (150°X75°)
Life time (h)	50000h L70B10
IP	65
Control gear	DALI
Average life time (h)	Up to 100,000hrs LM70,Ta 25°C
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<6
CRI	≥70
IK	IK08