



---

---

**Dimensions**

---

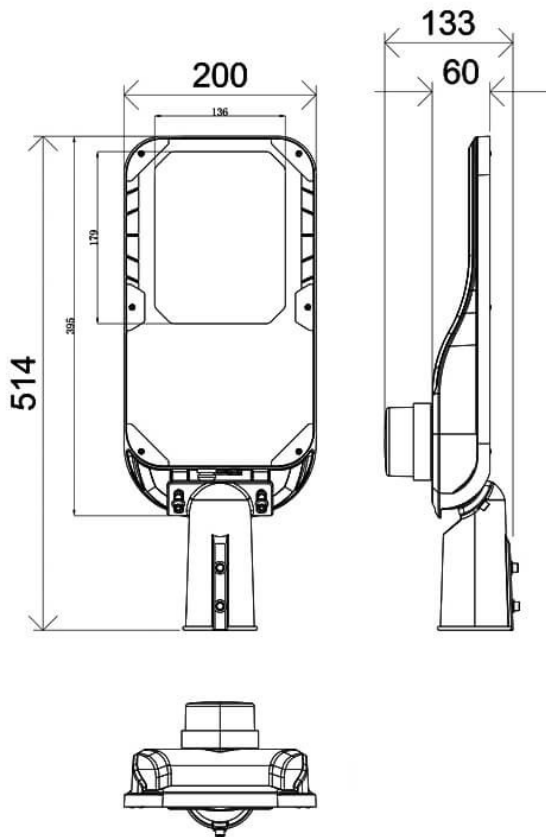
<b>Product dimensions (mm)</b>	<b>220x515x85mm</b>
--------------------------------	---------------------

---





---

---

**Scheme**



Vialight II

Item code	86.OS11.2473.03
Product type	Outdoor
Category	Street lights
Family	Vialight II
Pictograms	<div><div>220 240 V</div><div>850°</div><div></div><div>Driver INCL.</div><div></div><div></div><div></div><div>IP 66</div><div>CRI 70</div><div>SDCM 5</div><div>50000h L70B10</div><div>IK 08</div></div>

Product	
Real power (W)	40
Real luminous flux (Lm)	6400
Luminous efficiency (Lm/W)	160
Beam angle (°)	T2 (150°X75°)
Life time (h)	50000h L70B10
IP	65
Control gear	DALI
Average life time (h)	Up to 100,000hrs LM70,Ta 25°C
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<6
CRI	≥70
IK	IK08