OUTDOOR / WALL WASHER / SNAKE 3 / SNAKE 3RGBW

Item code 86.OW10.1020.03

- **Installation and wiring of luminaire must be in accordance with all applicabie local codes.**
- **Installation,inspection,and maintenance of luminaires should be performed by a qualified electrician.**
- **DO NOT make or alter any open holes in the luminaire Do not modify the luminaire.**
- **DO NOT install damaged product.**
- **Make sure electrical power is OFF before and during installation and maintenance.**
- **Make sure the equipment is properly grounded.**
- **Make sure the supply voltage is same as the rated fixture voltage.**

Lamp size diagram:

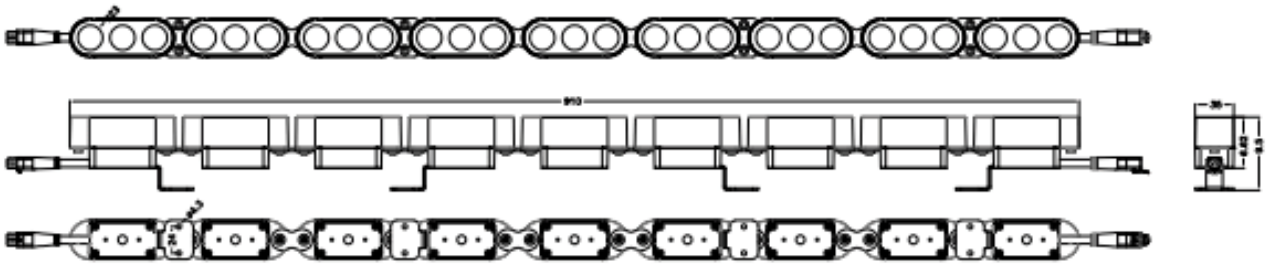

1. Drill holes on the mounting surface and embed two expansion rubber plugs.

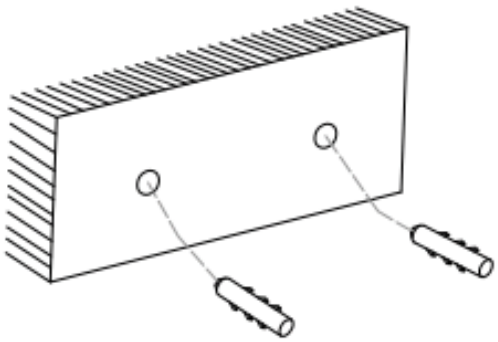

2.Align the holes of the lamp bracket with the expansion rubber plug and place them flat on the installation surface.

3. Use self-tapping screws to completely secure the bracket to the mounting surface.

4.The installation position corresponding to the mutual connection of the male and female waterproof connector of each lamp.

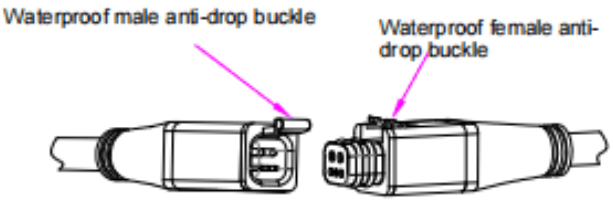

Schematic diagram of waterproof male and female connector direction

5.The male and female waterproof connector are plugged into each other according to the direction until the buckle is inserted into the slot.

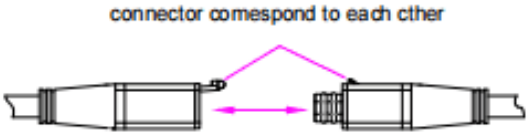

nstallation completed effect picture

6.Pry the male connector upwards to prevent the release of the buckle and then apply force to the male and female connector horizontal movement in both directions to make them separate.

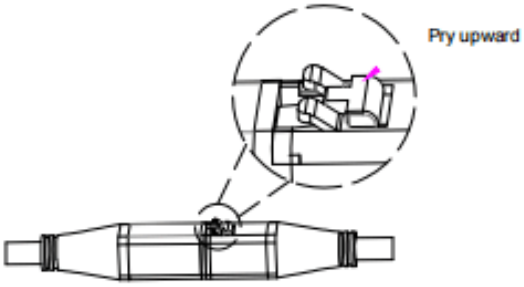

Llamp wiring diagram, wiring mode is series

Lighting wiring diagram:

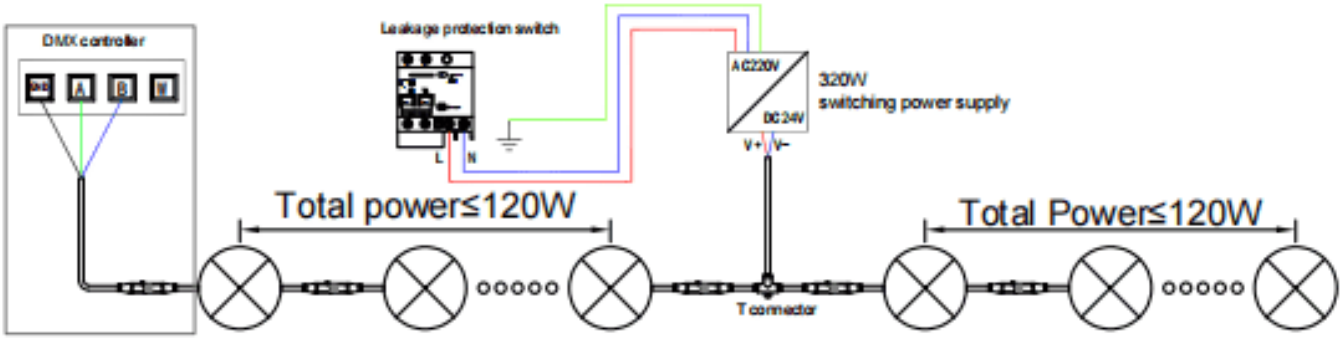

Remark:Single color don't need controller

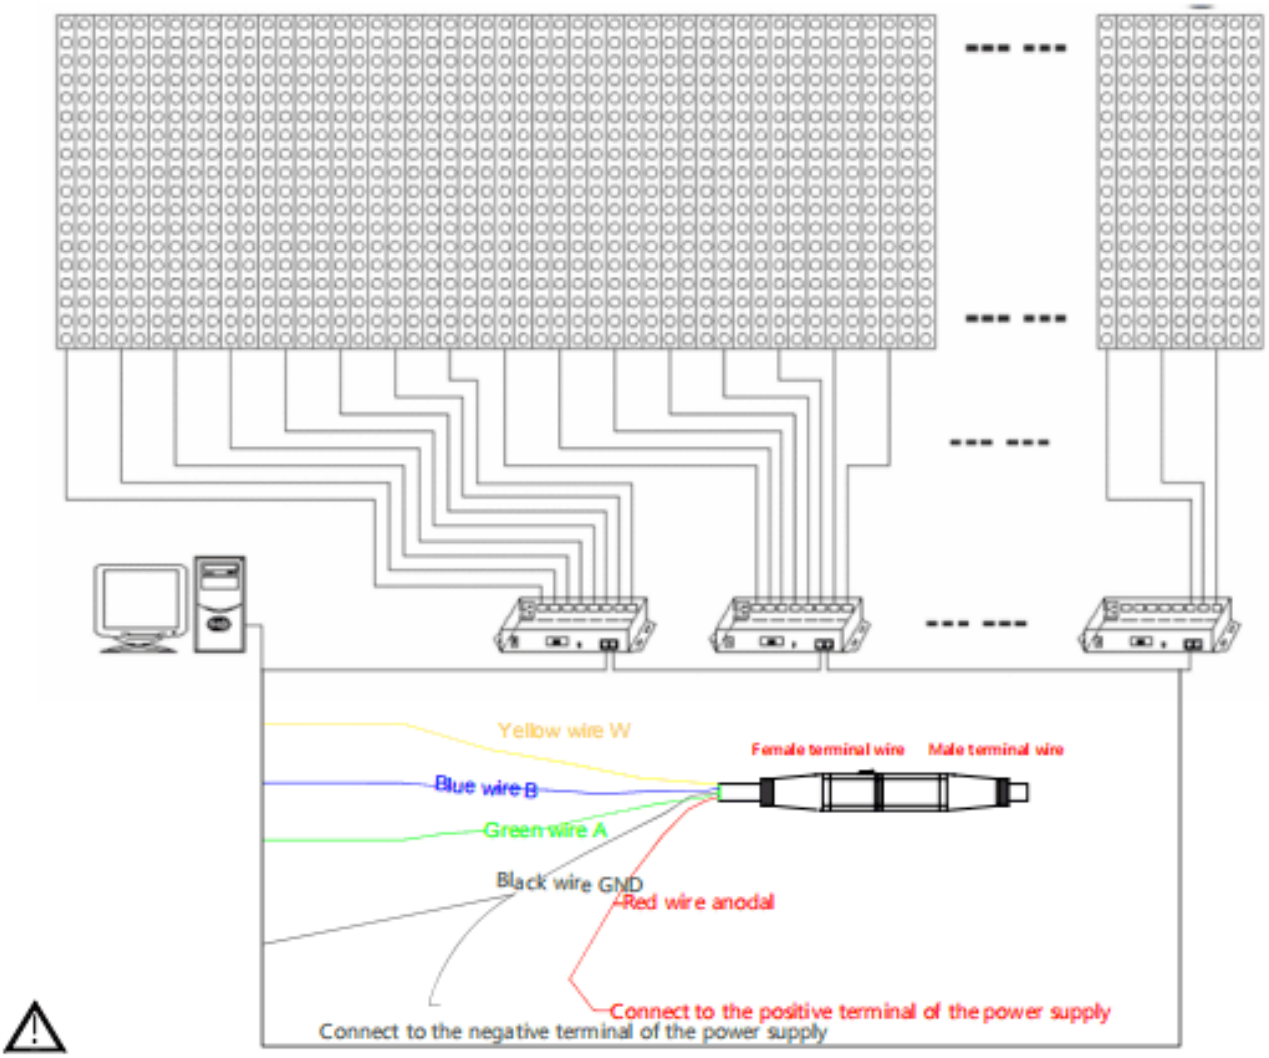

1. Need to consider the diameter of main cable when several fixtures connect together, and the loaded current of main cable need to more than the total current of all fixtures.

2.Need to choose the suitable leakage protection switch for power distribution, also need to pay attention on fixture driver, cable length and wet environment might increase leakage current.