



Instruction Manual



PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to + 45°C(-4°F to +113°F)			
	With PIR	-20°C to + 40°C(-4°F to +104°F)			
	DALI	-30°C to + 50°C(-22°F to +122°F)			
Storing Temperature		-40°C to + 70°C(-40°F to +158°F)			

Dimmable

<p>L brown black</p> <p>N blue white</p> <p>Ⓜ GND yellow/green green</p>	<p>DIM+/DA1 purple</p> <p>DIM-/DA2 gray</p>	<p>DIM+/DA1 purple</p> <p>DIM-/DA2 pink</p>	<p>DIM+/DA1 blue</p> <p>DIM-/DA2 white</p>	<p>DIM+/DA1 brown</p> <p>DIM-/DA2 blue</p>	<p>DIM+/DA1 black</p> <p>DIM-/DA2 gray</p>	<p>DIM+/DA1 red</p> <p>DIM-/DA2 orange</p>
	<p>Aux 12Vdc+ purple</p> <p>Aux 12Vdc- gray</p>	<p>Aux 12Vdc+ pink</p> <p>Aux 12Vdc- black/white</p>	<p>Aux 12Vdc+ purple</p> <p>Aux 12Vdc- black/white</p>	<p>Aux 12Vdc+ pink</p> <p>Aux 12Vdc- black/white</p>	<p>Aux 12Vdc+ purple</p> <p>Aux 12Vdc- black/white</p>	<p>Aux 12Vdc+ pink</p> <p>Aux 12Vdc- black/white</p>
	<p>DIM+/DA1 purple</p> <p>DIM-/DA2 gray</p>	<p>DIM+/DA1 pink</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 blue</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 brown</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 black</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 red</p> <p>DIM-/DA2 black/white</p>
	<p>DIM+/DA1 purple</p> <p>DIM-/DA2 gray</p>	<p>DIM+/DA1 pink</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 blue</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 brown</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 black</p> <p>DIM-/DA2 black/white</p>	<p>DIM+/DA1 red</p> <p>DIM-/DA2 black/white</p>




Warning! do not wire dim cord to high voltage, or dim function will fail.

- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS

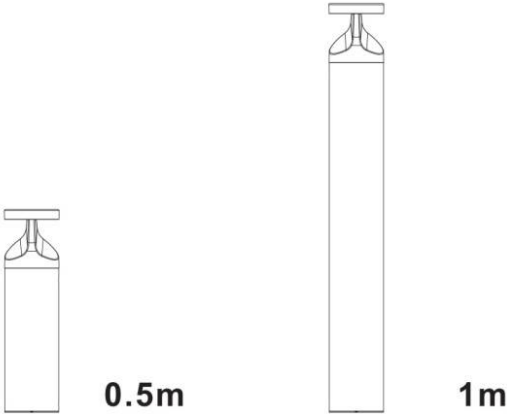

Physical Dimensions(mm/inch)



Installation

