



---

---

**Dimensions**

---


<b>Product dimensions (mm)</b>	<b>290x665x85mm</b>
--------------------------------	---------------------

---







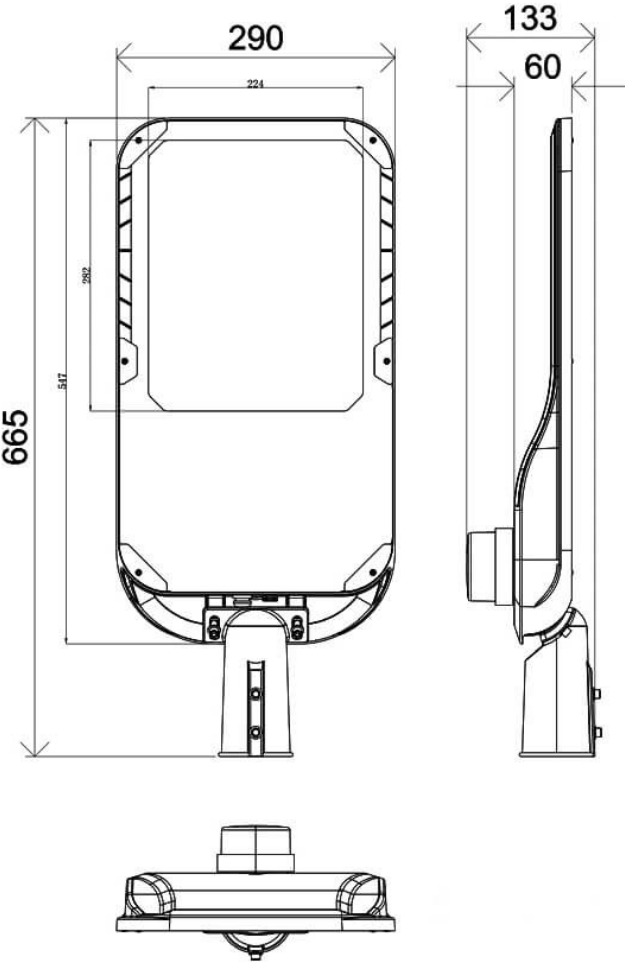


---

---

**Scheme**



Vialight II

Item code	86.OS11.B471.03
Product type	Outdoor
Category	Street lights
Family	Vialight II
Pictograms	 220 240 V  850°  Driver INCL.    IP 66  CRI 70  SDCM 5  50000h L70B10  IK 08

Product	
Real power (W)	240
Real luminous flux (Lm)	38400
Luminous efficiency (Lm/W)	160
Beam angle (°)	T2 (150°X75°)
Life time (h)	50000h L70B10
IP	65
Control gear	ON-OFF
Average life time (h)	Up to 100,000hrs LM70,Ta 25°C
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<6
CRI	>70
IK	IK08