





### Tracking and luminaire:

First tracking rail should have one side connecting plate&last tracking rail with no connecting plate on both sides, then fix the Luminaire to tracking rail then lock holder, then keep end caps at both sides.

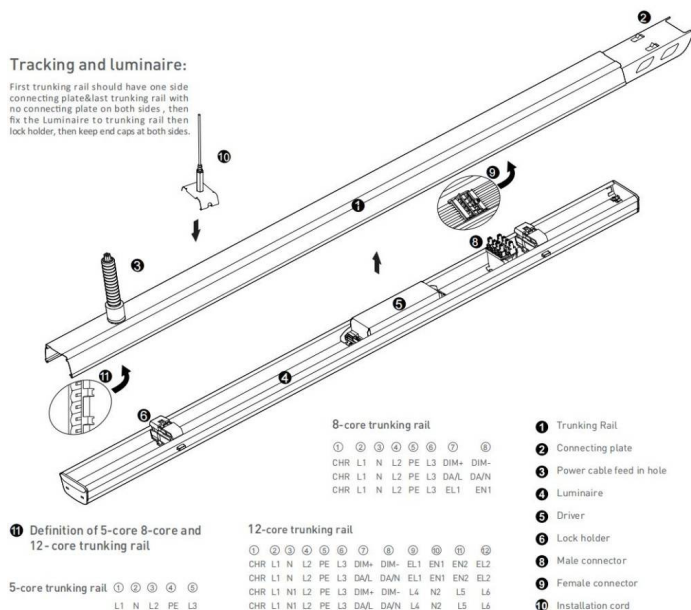


### Step 1 Mounting Suspension

Adjust length of suspension cord:  
a. press down Hexagon bolt;  
b. Pull in/out cord to adjust length




### Step 2 Connecting Power Supply






Connect wires according labeling on wires to feed in connector then connect to connector in tracking rail

### Step 3 Connecting Trunking Rail





Both trunking rails should keep in perfect position then push to click




### Step 4 Mounting Luminaire



### Step 5 LED linear lighting system




### Wire diagram of triple circuits function



### Pendant and mounting installation

Starting installation distances point should be 800 mm to 1000 mm, then in between 1st & 2nd point should be 3000 mm max

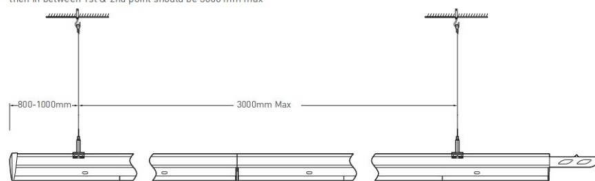


### Four options for installation



Safety notes:  
Installation should be performed only by  
qualified electrician .


- Make sure no voltage while installation .
- Connect cable wires according to wire labeling.
- Max current should not exceed 16A in one power feed in circuit.

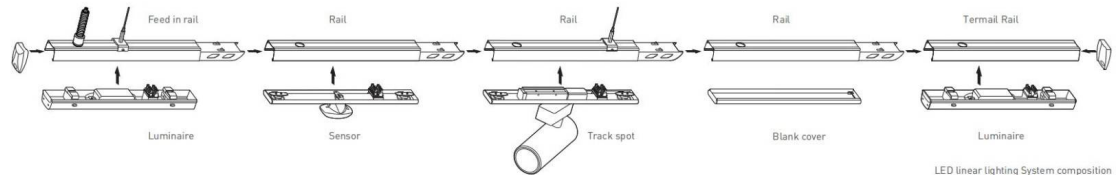

LED linear lighting System composition



#### Terminal module:

Terminal module can be independently installed as  
a single unit, it also can be connected at end of one  
linear light row.

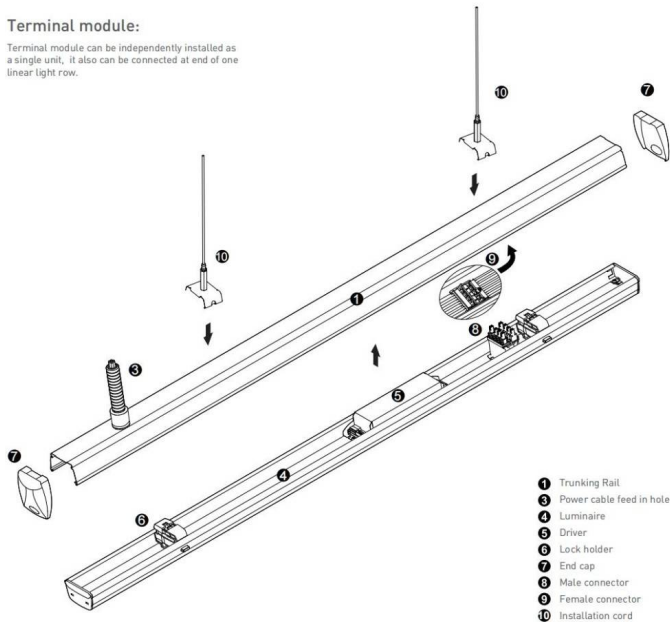

#### Step 1 Mounting Suspension




Drill a hole on ceiling




Adjust length of suspension cord:  
a. press down Hexagon bolt;  
b. Pull in/out cord to adjust length




#### Step 2 Connecting Power Supply



#### Step 3 Mounting Luminaire



Slide knob to select phase L1/L2/L3



Make sure male & female connectors  
in right position then fix the luminaire  
to trunking rail

