













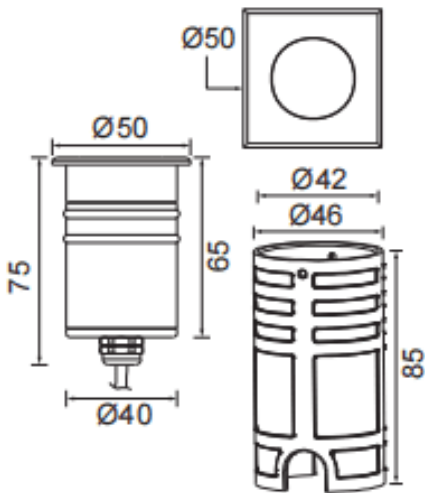
DRIVE ON S

Item code	86.OI10.0321.07
Product type	Outdoor
Category	Recessed Inground Floor
Family	DRIVE ON
Subfamily	DRIVE ON S
Pictograms	 50 Hz 220 V 240 V  850°  IK 10  CRI 80  SDCM 3   Driver INCL   50000h L80B10  IP 67

Dimensions

Product dimensions (mm) 50x50x75mm

Scheme



Product	
Real power (W)	4.5
Real luminous flux (Lm)	395
Luminous efficiency (Lm/W)	87.8
Beam angle (°)	24
Life time (h)	50000h L80B10
IP	67
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM3
CRI	80
IK	IK10

Photometry

RECESSED INGROUND FLOOR - DRIVE
ON

Item code 86.OI10.0321.07

