**SPIKE SPOT LIGHT - TUBEO-R** **Item code 86.OS04.2341.02**

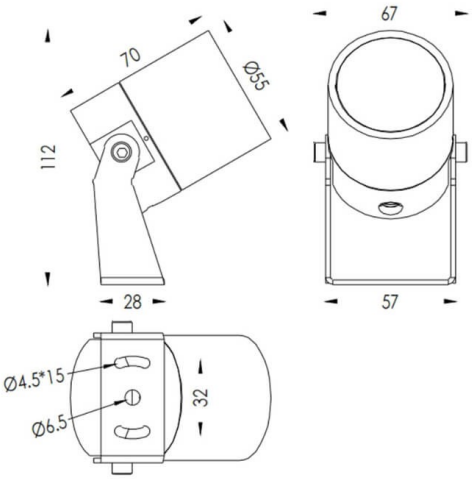


## TUBEO-R

| | |
|---|---|
| **Item code** | **86.OS04.2341.02** |
| **Product type** | **Outdoor** |
| **Category** | **Spike Spot Light** |
| **Family** | **TUBEO-R** |
| **Subfamily** | **TUBEO-R** |
| **Pictograms** |  |

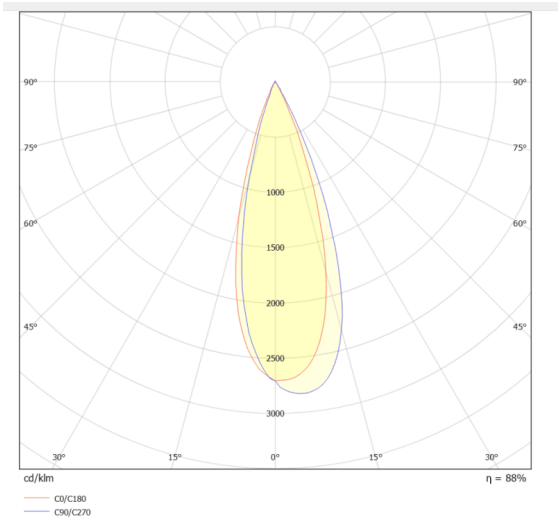
| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **55(Dia)X170(H)mm** |

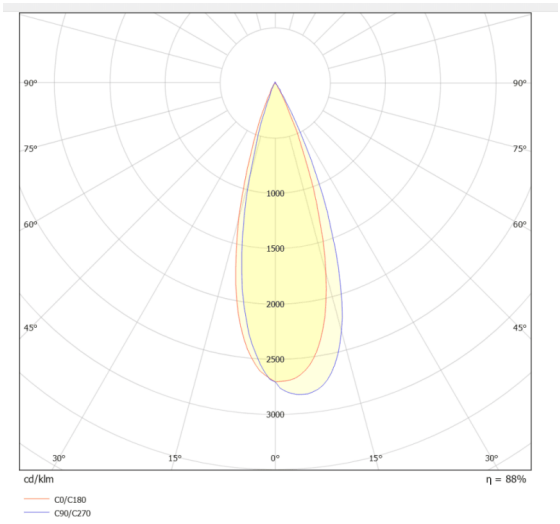
**Scheme**

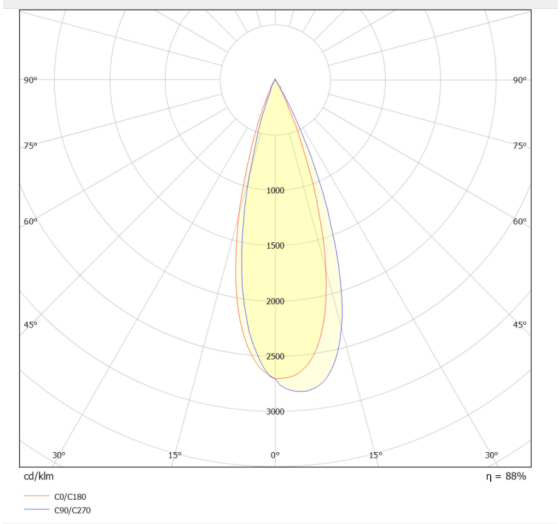



| **Product** | |
|---|---|
| **Real power (W)** | **6** |
| **Real luminous flux (Lm)** | **454** |
| **Luminous efficiency (Lm/W)** | **75.67** |
| **Beam angle (º)** | **36** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **65** |
| **Control gear** | **ON-OFF** |
| **Average life time (h)** | **50000h L70B10** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK10** |

## Photometry


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270