



---

---

**Scheme**

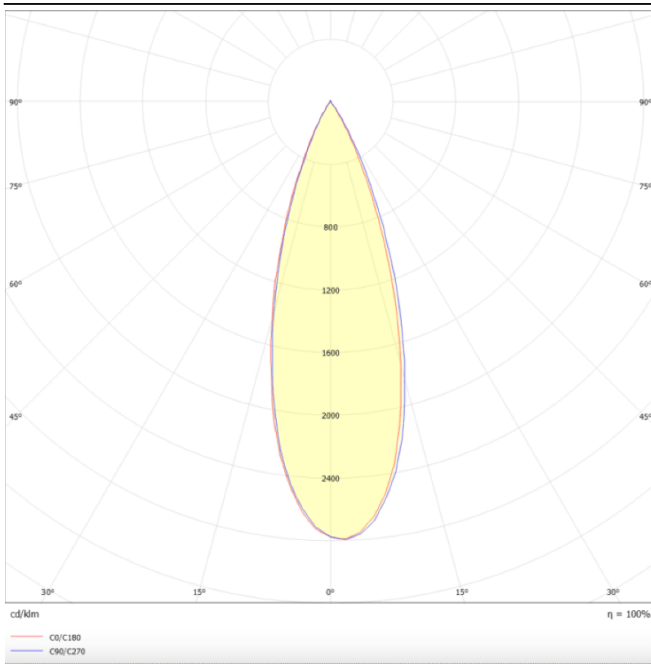
---







---

---

**Photometry**



**PRO-DR**

|              |   |
|--------------|---|
| Item code    | 86.D025.3433.03   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | PRO-D   |
| Subfamily    | PRO-DR  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div><br/>XX°</div><div>CRI<br/>90</div><div></div></div> <div><div>Driver<br/>INCL</div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

| Product                    |                    |
|----------------------------|--------------------|
| Real power (W)             | 28.7               |
| Real luminous flux (Lm)    | 2336               |
| Luminous efficiency (Lm/W) | 81.400000000000006 |
| Beam angle (°)             | 36                 |
| Life time (h)              | 50000 h L80B10     |
| IP                         | 20                 |
| Control gear               | DALI               |
| Colour temperature (K)     | 4000               |
| Colour consistency (SDCM)  | SDCM<3             |
| CRI                        | 90                 |