



---


#### Scheme

---





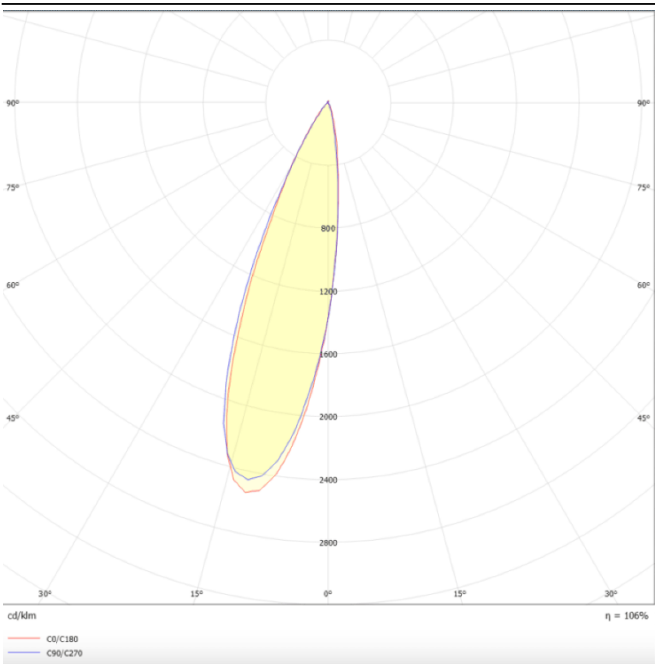

---

#### Photometry



PRO-DS

|              |   |
|--------------|---|
| Item code    | 86.D026.1333.01   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | PRO-D   |
| Subfamily    | PRO-DS  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div></div><div>CRI<br/>90</div><div></div><div>Driver<br/>INCL</div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

|                            |                |
|----------------------------|----------------|
| Product                    |                |
| Real power (W)             | 12.2           |
| Real luminous flux (Lm)    | 787.5          |
| Luminous efficiency (Lm/W) | 64.56          |
| Beam angle (°)             | 36             |
| Life time (h)              | 50000 h L80B10 |
| IP                         | 20             |
| Control gear               | DALI           |
| Colour temperature (K)     | 3000           |
| Colour consistency (SDCM)  | SDCM<3         |
| CRI                        | 90             |