



---


#### Scheme

---







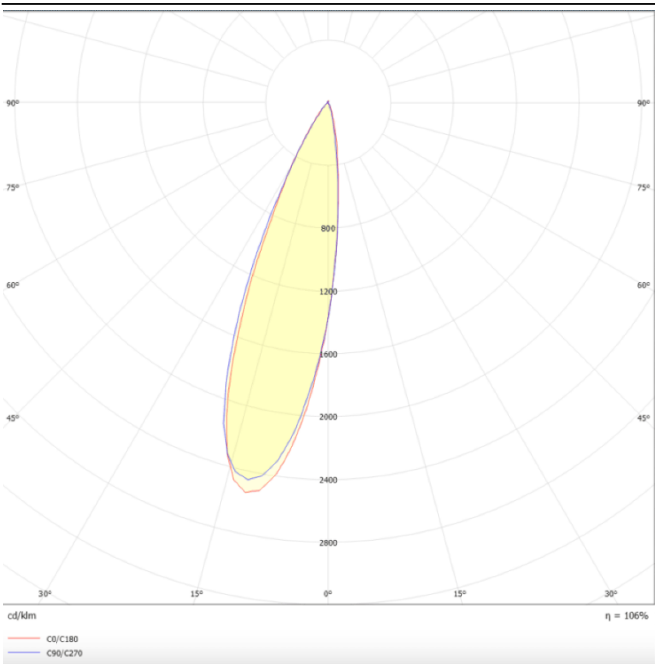




---

#### Photometry



PRO-DS

Item code	86.D026.1333.01
Product type	Indoor
Category	Downlights
Family	PRO-D
Subfamily	PRO-DS
Pictograms	<div><div> 220 240 V</div><div> XX°</div><div> CRI 90</div><div> CE</div><div> Driver INCL</div><div> On Off</div><div> DALI</div><div> IP 20</div><div> 50000h L80B10</div></div>

Product	
Real power (W)	12.2
Real luminous flux (Lm)	787.5
Luminous efficiency (Lm/W)	64.56
Beam angle (°)	36
Life time (h)	50000 h L80B10
IP	20
Control gear	DALI
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90