


## PRO-DS Smart

| | |
|---|---|
| **Item code** | **86.DS26.1429.03** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **PRO-D** |
| **Subfamily** | **PRO-DS Smart** |
| **Pictograms** |  |

## Scheme

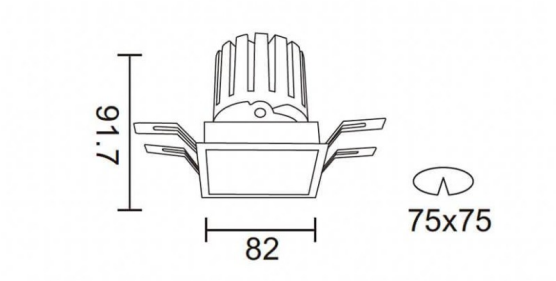


| **Product** | |
|---|---|
| **Real power (W)** | **12.2** |
| **Real luminous flux (Lm)** | **787.5** |
| **Luminous efficiency (Lm/W)** | **64.56** |
| **Beam angle (º)** | **24** |
| **Life time (h)** | **50000 h L80B10** |
| **IP** | **20** |
| **Control gear** | **DALI+wireless Casambi** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |