





**Instruction Manual**

⑤

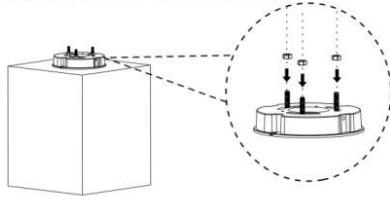


3 PCS  
10  
8 Nm

The direction of light should be on both side of notch. Please install bollard head properly.

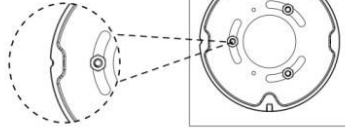

⑥

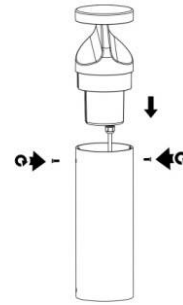


2 PCS  
T25  
2.5 Nm

⑦




⑧

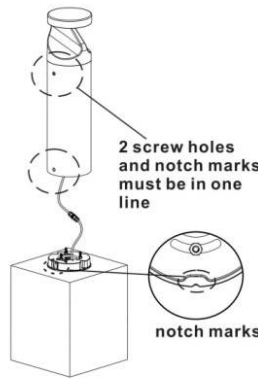

2 screw holes and notch marks must be in one line

notch marks


⑨

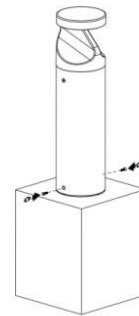


2 PCS  
T25  
2.5 Nm

**PIR sensor detection coverage**

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.

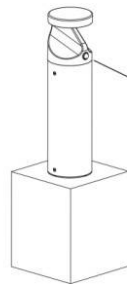

PIR sensor

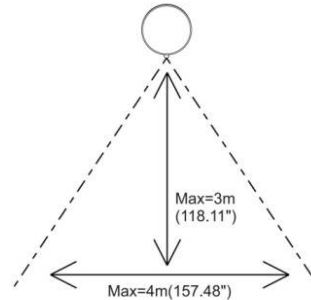

Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to +45°C (-4°F to +113°F)			
	With PIR	-20°C to +40°C (-4°F to +104°F)			
	DALI	-30°C to +50°C (-22°F to +122°F)			
Storing Temperature		-40°C to +70°C (-40°F to +158°F)			

**Dimmable**






⊕ DIM+/DA1	purple	or	purple	or	blue	or	brown	or	black	or	red
⊖ DIM-/DA2	gray		pink		white		blue		gray		orange
⊕ DIM+/DA1	purple		purple		purple		purple		purple		purple
⊖ DIM-/DA2	gray		pink		gray		pink		pink		pink
Aux 12Vdc +	pink		black/white		black/white		red		red		red
⊕ DIM+/DA1	purple		purple		purple		purple		purple		purple
⊖ DIM-/DA2	gray		pink		pink		pink		pink		pink
Aux 12Vdc +	pink		black/white		black/white		red		red		red
Aux 12Vdc -	black/white		blue/white		orange		orange		orange		orange
L	brown		black		black		black		black		black
N	blue		white		white		white		white		white
⊕ GND	yellow/green		green		green		green		green		green
⊖ GND	yellow/green		green		green		green		green		green
⊕ DIM+/DA1	black		black		black		black		black		black
⊖ DIM-/DA2	gray		orange		orange		orange		orange		orange



Warning! do not wire dim cord to high voltage, or dim function will fail.

- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

### Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS




0.5m



1m

### Physical Dimensions(mm/inch)



500(19.69")




1000(39.37")

Ø133(5.24")




Ø135  
(5.31")




### Installation


①



②

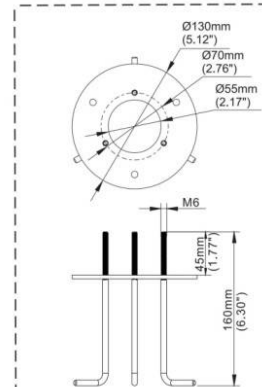

③



Hole Diameter:  
Ø30-55mm  
(Ø1.18"-2.17")

④

Suggested cement  
column size

