




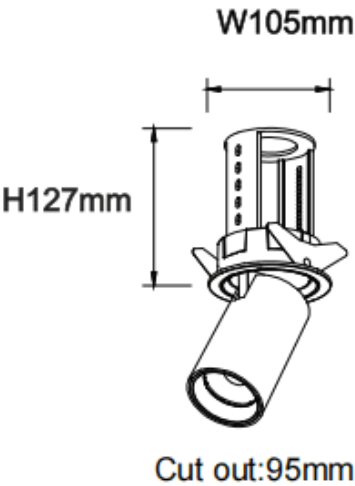
PTT R

|              |  |
|--------------|--|
| Item code    | 86.D146.4423.02  |
| Product type | Indoor   |
| Category     | Downlights   |
| Family       | PTT  |
| Subfamily    | PTT R  |
| Pictograms   | <div><div></div><div><div>220<br/>240 V</div></div><div><div>CRI<br/>90</div></div><div><div>CE</div></div><div><div>Driver<br/>INCL.</div></div><div><div>On<br/>Off</div></div><div><div>DALI</div></div><div><div>IP<br/>20</div></div><div><div>50000h<br/>L80B10</div></div><div><div>355</div></div><div><div>90°</div></div></div> |

Dimensions

Product dimensions (mm) Ø105xH127mm

Scheme



|                            |                |
|----------------------------|----------------|
| Product                    |                |
| Real power (W)             | 30             |
| Real luminous flux (Lm)    | 3000           |
| Luminous efficiency (Lm/W) | 100            |
| Beam angle (°)             | 24             |
| Life time (h)              | 50000 h L80B10 |
| Control gear               | DALI           |
| Colour temperature (K)     | 4000           |
| Colour consistency (SDCM)  | SDCM3          |
| CRI                        | 90             |