














PTT RT

|              |   |
|--------------|---|
| Item code    | 86.D148.3413.02   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | PTT   |
| Subfamily    | PTT RT  |
| Pictograms   | <div><div>220<br/>240 V</div><div>CRI<br/>90</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div><div>DALI</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div><div>355</div><div>90°</div></div> |

Dimensions

Product dimensions (mm) Ø84xH105mm

Scheme

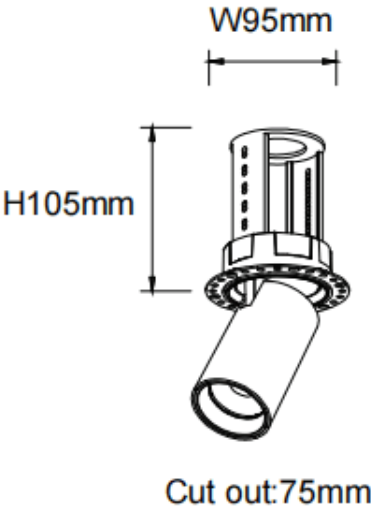

|                            |                |
|----------------------------|----------------|
| Product                    |                |
| Real power (W)             | 18             |
| Real luminous flux (Lm)    | 1800           |
| Luminous efficiency (Lm/W) | 100            |
| Beam angle (°)             | 15             |
| Life time (h)              | 50000 h L80B10 |
| Control gear               | DALI           |
| Colour temperature (K)     | 4000           |
| Colour consistency (SDCM)  | SDCM3          |
| CRI                        | 90             |