




### Circle up&down

|              |                           |
|--------------|---------------------------|
| Item code    | 86.A001.4401.01           |
| Product type | Indoor                    |
| Category     | Architectural luminaires  |
| Family       | Circle up&down            |
| Pictograms   | <div> </div> <div> </div> |

### Dimensions

Product dimensions (mm) 60x80xdiam 3000

### Scheme

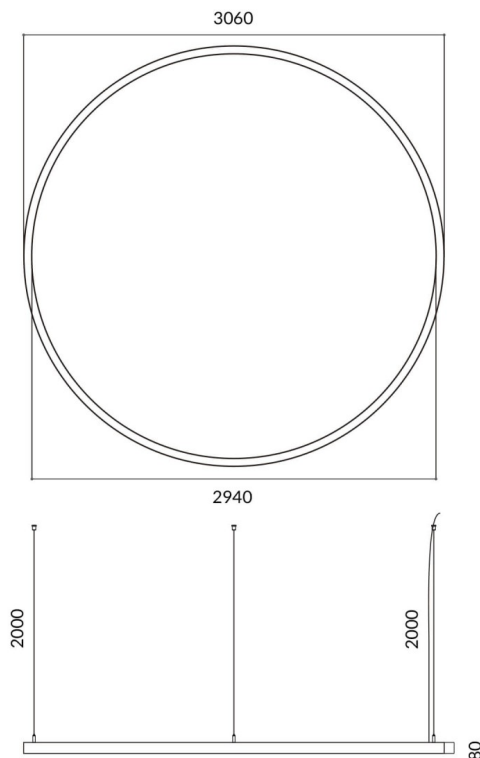

|                           |                    |
|---------------------------|--------------------|
| Product                   |                    |
| Real power (W)            | Up 60W,Down 180 W  |
| Real luminous flux (Lm)   | 5400/16200         |
| Chip Brand                | Sanan              |
| Control gear              | ON-OFF             |
| Power Factor              | >0,95              |
| Average life time (h)     | L80 B20, 50,000hrs |
| Colour temperature (K)    | 4000K              |
| Colour consistency (SDCM) | SDCM<3             |
| CRI                       | 80                 |