


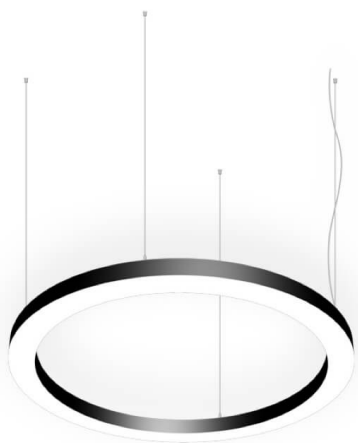


### Circle up&down

|              |                                                                                                    |
|--------------|----------------------------------------------------------------------------------------------------|
| Item code    | 86.A001.4401.03                                                                                    |
| Product type | Indoor                                                                                             |
| Category     | Architectural luminaires                                                                           |
| Family       | Circle up&down                                                                                     |
| Pictograms   | 220<br>240 V            CRI 80            SDCM 3<br>Driver INCL            On/Off            IP 20 |

### Dimensions

Product dimensions (mm) 60x80xdiam 3000

### Scheme

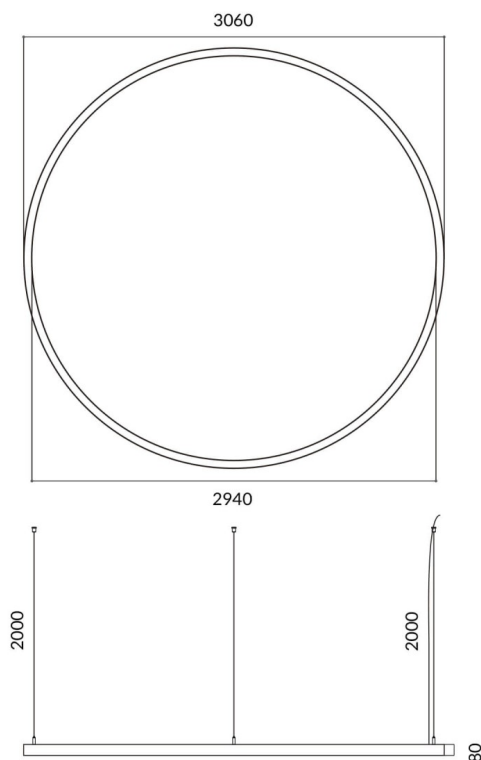

### Product

|                           |                    |
|---------------------------|--------------------|
| Real power (W)            | Up 60W,Down 180 W  |
| Real luminous flux (Lm)   | 5400/16202         |
| Chip Brand                | Sanan              |
| Control gear              | ON-OFF             |
| Power Factor              | >0,95              |
| Average life time (h)     | L80 B20, 50,000hrs |
| Colour temperature (K)    | 4000K              |
| Colour consistency (SDCM) | SDCM3              |
| CRI                       | 80                 |