



## Circle up&down

Lavov architectural lumnaire from the family Circle up&down with a power of Up 30W,Down 120 W and a difuse lighting distribution.With a real lumen output of 2700/10800 lm. Made in Extruded aluminium and PC diffuser and finished in white color. Driver ON-OFF.

| | |
|---|---|
| **Item code** | **86.A001.2401.01** |
| **Product type** | **Indoor** |
| **Category** | **Architectural luminaires** |
| **Family** | **Circle up&down** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **60x80xdiam 2000** |

**Scheme**

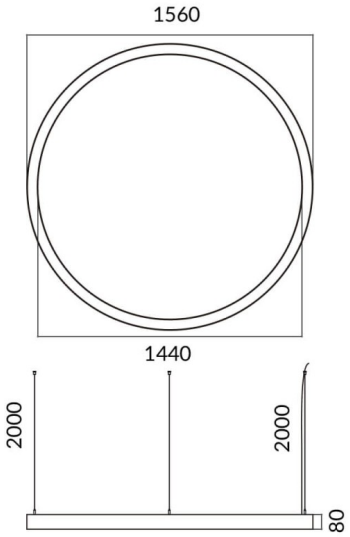


| **Product** | |
|---|---|
| **Real power (W)** | **Up 30W,Down 120 W** |
| **Real luminous flux (Lm)** | **2700/10800** |
| **Colour** | **white** |
| **Chip Brand** | **Sanan** |
| **Control gear included** | **yes** |
| **Control gear** | **ON-OFF** |
| **Power Factor** | **>0,95** |
| **Flicker Free** | **yes** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Average life time (h)** | **L80 B20, 50,000hrs** |
| **Colour temperature (K)** | **4000K** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |