



### Circle up&down


Lavov architectural luminaire from the family Circle up&down with a power of Up 30W,Down 120 W and a diffuse lighting distribution. With a real lumen output of 2700/10801lm. Made in Extruded aluminium and PC diffuser and finished in black color. Driver ON-OFF.

Item code	86.A001.2401.02
Product type	Indoor
Category	Architectural luminaires
Family	Circle up&down
Pictograms	<div> <div> </div> <div> 220 240 V </div> <div> CRI 80 </div> <div> SDCM 3 </div> <div> CE </div> <div> Driver INCL. </div> <div> On Off </div> <div> IP 20 </div> </div>

### Dimensions

Product dimensions (mm) 60x80xdiam 2000

### Scheme

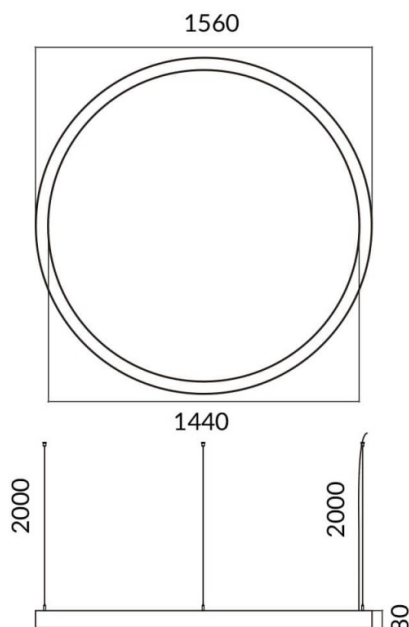

Product	
Real power (W)	Up 30W,Down 120 W
Real luminous flux (Lm)	2700/10801
Colour	black
Chip Brand	Sanan
Control gear included	yes
Control gear	ON-OFF
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80