











Circle up&down


Lavov architectural luminaire from the family Circle up&down with a power of Up 30W, Down 120 W and a diffuse lighting distribution. With a real lumen output of 2700/10802lm. Made in Extruded aluminium and PC diffuser and finished in silver color. Driver ON-OFF.

Item code	86.A001.2401.03
Product type	Indoor
Category	Architectural luminaires A
Family	Circle up&down
Pictograms	       

Dimensions

Product dimensions (mm) 60x80xdiam 2000

Scheme

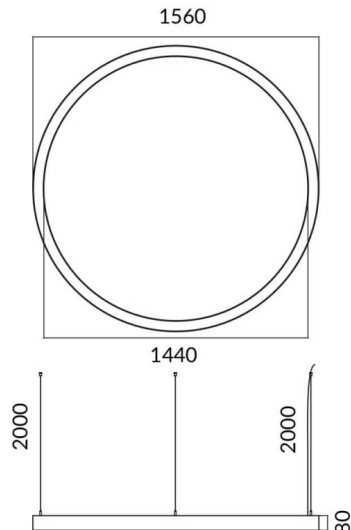

Product	
Real power (W)	Up 30W, Down 120 W
Real luminous flux (Lm)	2700/10802
Colour	silver
Chip Brand	Sanan
Control gear included	yes
Control gear	ON-OFF
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80