




## Circle up&down

Lavov architectural lumnaire from the family Circle up&down with a power of Up 30W,Down 120 W and a difuse lighting distribution. With a real lumen output of 2700/10800 lm. Made in Extruded aluminium and PC diffuser and finished in white color. Driver DALI.

Item code	86.A001.2403.01 Indoor Architectural luminaires	
Product type		
Category		
Family	Circle up&down	
Pictograms	( cRI SDCM 3 C€	
	Driver IP 20	

Dimensions	
Product dimensions (mm)	60x80xdiam 2000

## Scheme

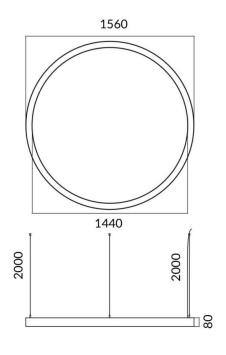

Product	
Real power (W)	Up 30W,Down 120 W
Real luminous flux (Lm)	2700/10800
Colour	white
Chip Brand	Sanan
Control gear included	yes
Control gear	DALI
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80