











Circle up&down


Lavov architectural luminaire from the family Circle up&down with a power of Up 30W,Down 120 W and a diffuse lighting distribution. With a real lumen output of 2700/10801lm. Made in Extruded aluminium and PC diffuser and finished in black color. Driver DALI.

Item code	86.A001.2403.02
Product type	Indoor
Category	Architectural luminaires
Family	Circle up&down
Pictograms	       

Dimensions

Product dimensions (mm) 60x80xdiam 2000

Scheme

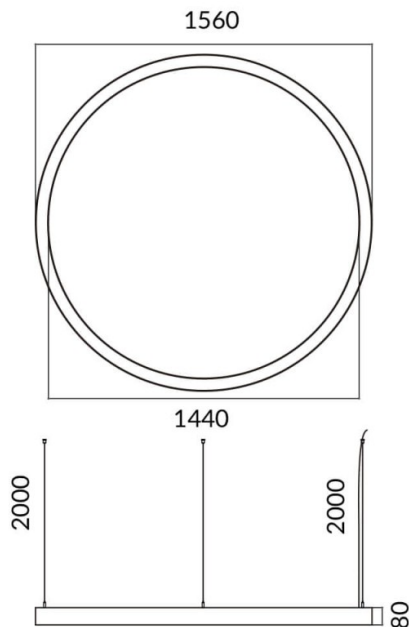

Product	
Real power (W)	Up 30W,Down 120 W
Real luminous flux (Lm)	2700/10801
Colour	black
Chip Brand	Sanan
Control gear included	yes
Control gear	DALI
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80