




**Dimensions**

**Product dimensions (mm)**      **60x80xdiam 3000**

**Scheme**

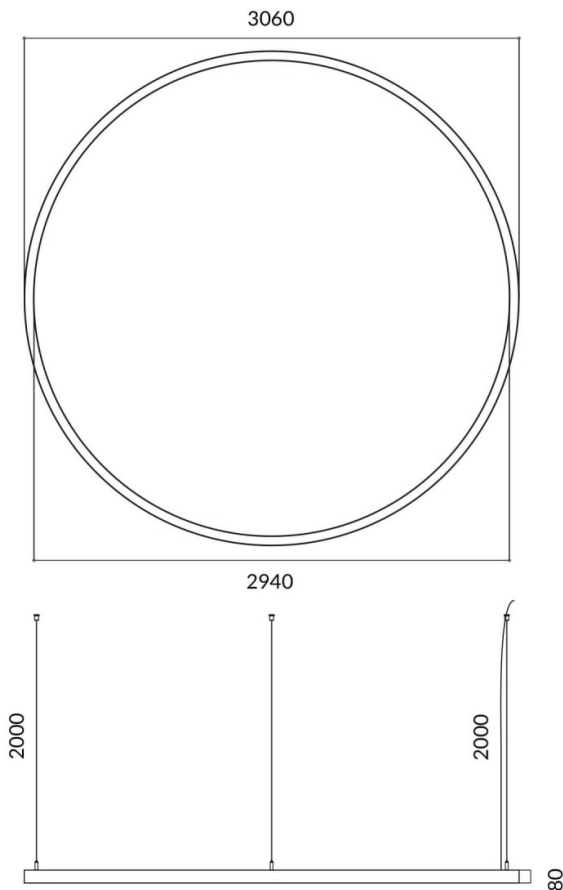

### Circle up&down

Lavov architectural luminaire from the family Circle up&down with a power of Up 60W,Down 180 W and a diffuse lighting distribution. With a real lumen output of 5400/16202lm. Made in Extruded aluminium and PC diffuser and finished in silver color. Driver ON-OFF.

Item code	86.A001.4401.03
Product type	Indoor
Category	Architectural luminaires
Family	Circle up&down
Pictograms	220 240 V            CRI 80            SDCM 3 Driver INCL            On Off            IP 20

Product	
Real power (W)	Up 60W,Down 180 W
Real luminous flux (Lm)	5400/16202
Colour	silver
Chip Brand	Sanan
Control gear included	yes
Control gear	ON-OFF
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80