




Dimensions	
Product dimensions (mm)	60x80xdiam 3000

Scheme



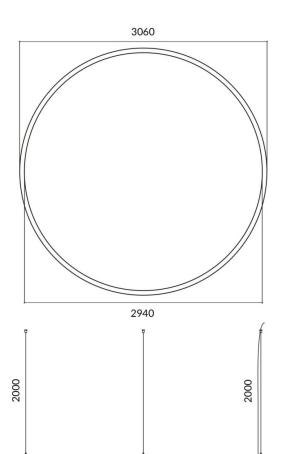

Circle up&down

Lavov architectural lumnaire from the family Circle up&down with a power of Up 60W,Down 180 W and a difuse lighting distribution. With a real lumen output of 5400/16200 lm. Made in Extruded aluminium and PC diffuser and finished in white color. Driver DALI.

Item code	86.A001.4403.01 Indoor Architectural luminaires	
Product type		
Category		
Family	Circle up&down	
Pictograms	220 v CRI SDCM 3	
	Driver IP 20	

Product	
Real power (W)	Up 60W,Down 180 W
Real luminous flux (Lm)	5400/16200
Colour	white
Chip Brand	Sanan
Control gear included	yes
Control gear	DALI
Power Factor	>0,95
Flicker Free	yes
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000K
Colour consistency (SDCM)	SDCM<3
CRI	80

