




### Circle

Lavov architectural luminaire from the family Circle with a power of 180W and a diffuse lighting distribution. With a real lumen output of 16200lm. Made in Extruded aluminium and PC diffuser and finished in silver color. Driver DALI.

|                     |                                 |
|---------------------|---------------------------------|
| <b>Item code</b>    | <b>86.A003.4403.03</b>          |
| <b>Product type</b> | <b>Indoor</b>                   |
| <b>Category</b>     | <b>Architectural luminaires</b> |
| <b>Family</b>       | <b>Circle</b>                   |
| <b>Pictograms</b>   |                                 |

### Scheme

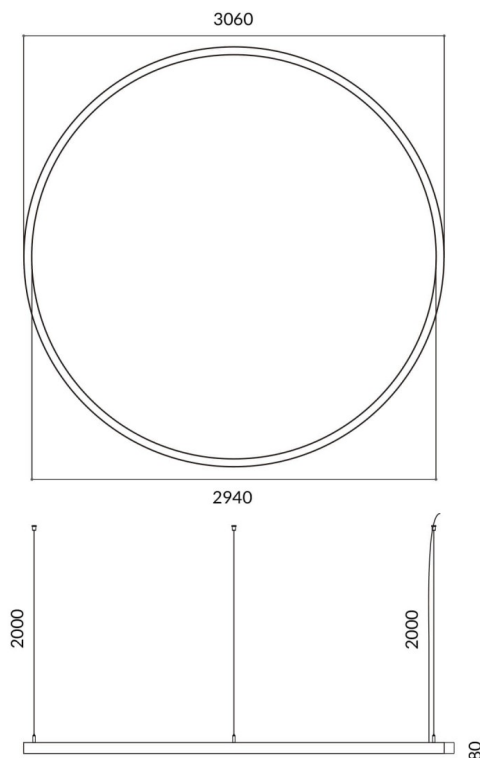

|                                  |                           |
|----------------------------------|---------------------------|
| <b>Product</b>                   |                           |
| <b>Real power (W)</b>            | <b>180W</b>               |
| <b>Real luminous flux (Lm)</b>   | <b>16200</b>              |
| <b>Colour</b>                    | <b>silver</b>             |
| <b>Chip Brand</b>                | <b>Sanan</b>              |
| <b>Control gear included</b>     | <b>yes</b>                |
| <b>Control gear</b>              | <b>DALI</b>               |
| <b>Power Factor</b>              | <b>&gt;0,95</b>           |
| <b>Flicker Free</b>              | <b>yes</b>                |
| <b>Average life time (h)</b>     | <b>L80 B20, 50,000hrs</b> |
| <b>Colour temperature (K)</b>    | <b>4000K</b>              |
| <b>Colour consistency (SDCM)</b> | <b>SDCM&lt;3</b>          |
| <b>CRI</b>                       | <b>80</b>                 |