




### Trim cardan

Lavov downlight from the family Trim cardan with a power of 17W and a beam angle of 30°. Finished in white colour. With a total lumen output of 1580lm and a luminous efficacy of 93lm/W. Made in die cast aluminium and PC lenses. Driver DALI dimmable . CCT 3000K.

### Dimensions

Product dimensions (mm) L112\*W112\*H94mm

### Scheme

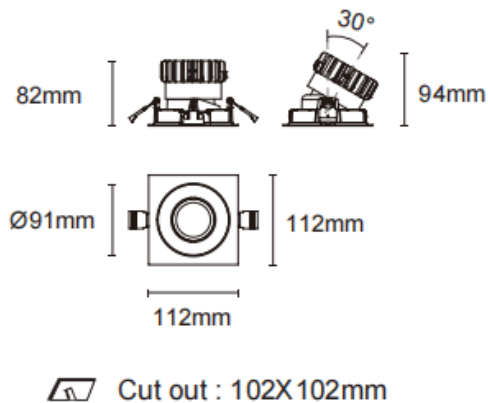

Item code	86.D090.1323.01
Product type	Indoor
Category	Downlights
Family	Cardan
Subfamily	Trim cardan
Pictograms	
Product	
Real power (W)	17
Real luminous flux (Lm)	1580
Luminous efficiency (Lm/W)	93
Beam angle (°)	30°
Life time (h)	50000hrs L80B10
IP	IP44
Colour	white
Control gear included	yes
Control gear	DALI dimmable
Flicker Free	yes
Light source	led
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90



### Product