



### Trim cardan 2


Lavov downlight from the family Trim cardan 2 with a power of 2x17W and a beam angle of 45°. Finished in black colour. With a total lumen output of 2x1580lm and a luminous efficacy of 93lm/W. Made in die cast aluminium and PC lenses. Driver On-Off no dim . CCT 4000K.


|                     |   |
|---------------------|---|
| <b>Item code</b>    | <b>86.D091.1431.02</b>  |
| <b>Product type</b> | <b>Indoor</b>   |
| <b>Category</b>     | <b>Downlights</b>   |
| <b>Family</b>       | <b>Cardan</b>   |
| <b>Subfamily</b>    | <b>Trim cardan 2</b>  |
| <b>Pictograms</b>   |  |

### Dimensions

**Product dimensions (mm)** **L224\*W112\*H94mm**

### Scheme

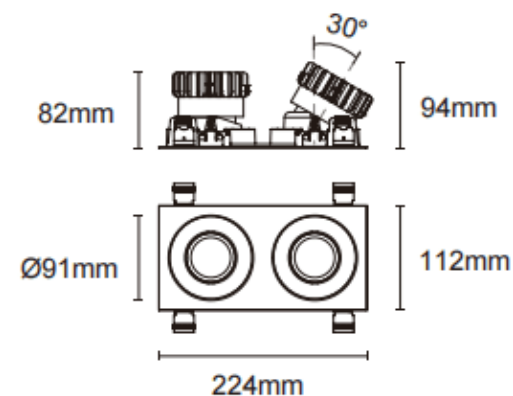

 Cut out : 102X212mm

|                                   |                        |
|-----------------------------------|------------------------|
| <b>Product</b>                    |                        |
| <b>Real power (W)</b>             | <b>2x17</b>            |
| <b>Real luminous flux (Lm)</b>    | <b>2x1580</b>          |
| <b>Luminous efficiency (Lm/W)</b> | <b>93</b>              |
| <b>Beam angle (°)</b>             | <b>45°</b>             |
| <b>Life time (h)</b>              | <b>50000hrs L80B10</b> |
| <b>IP</b>                         | <b>IP44</b>            |
| <b>Colour</b>                     | <b>black</b>           |
| <b>Control gear included</b>      | <b>yes</b>             |
| <b>Control gear</b>               | <b>On-Off no dim</b>   |
| <b>Flicker Free</b>               | <b>yes</b>             |
| <b>Light source</b>               | <b>LED</b>             |
| <b>Type of LED</b>                | <b>COB</b>             |
| <b>Colour temperature (K)</b>     | <b>4000</b>            |
| <b>Colour consistency (SDCM)</b>  | <b>SDCM3</b>           |
| <b>CRI</b>                        | <b>90</b>              |