


## Trim cardan 2

Lavov downlight from the family Trim cardan 2 with a power of 2x17W and a beam angle of 55º. Finished in white colour. With a total lumen output of 2x1580lm and a luminous efficacy of 93lm/W. Made in die cast aluminium and PC lenses. Driver DALI Casamby ready. CCT 4000K.

| | |
|---|---|
| **Item code** | **86.D091.1449.01** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **Cardan** |
| **Subfamily** | **Trim cardan 2** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **L224*W112*H94mm** |

**Scheme**

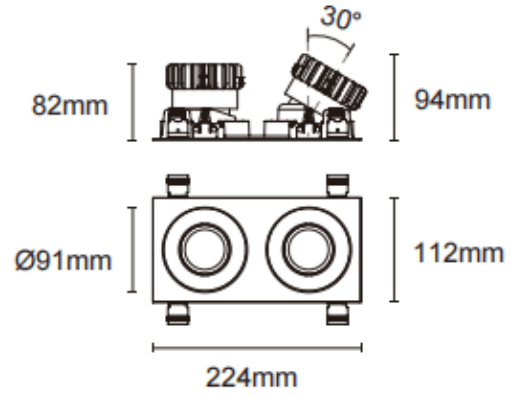


| **Product** | |
|---|---|
| **Real power (W)** | **2x17** |
| **Real luminous flux (Lm)** | **2x1580** |
| **Luminous efficiency (Lm/W)** | **93** |
| **Beam angle (º)** | **55º** |
| **Life time (h)** | **50000hrs L80B10** |
| **IP** | **IP44** |
| **Colour** | **white** |
| **Control gear included** | **yes** |
| **Control gear** | **DALI Casamby ready** |
| **Flicker Free** | **yes** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **90** |