




TUBULAR-S

|              |                                                                                                                                                                                      |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.SD01.5341.03                                                                                                                                                                      |
| Product type | Indoor                                                                                                                                                                               |
| Category     | Surface Downlights                                                                                                                                                                   |
| Family       | TUBULAR-S                                                                                                                                                                            |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div><br/>850°</div><div>CRI<br/>80</div><div>CE</div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

Dimensions

Product dimensions (mm) Ø170X182 mm

Scheme

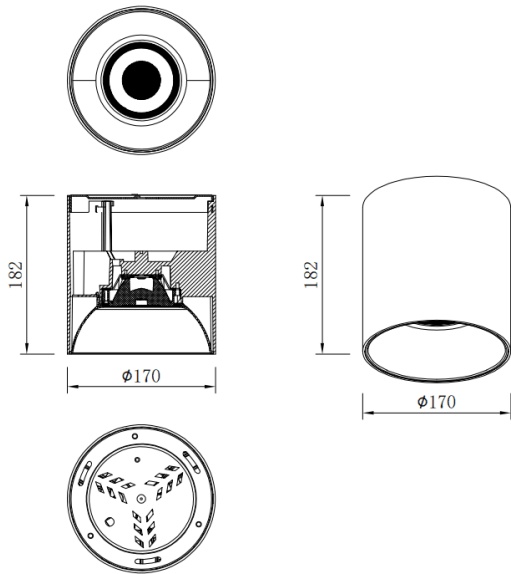

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 50            |
| Real luminous flux (Lm)    | 4000          |
| Luminous efficiency (Lm/W) | 80            |
| Beam angle (°)             | 60            |
| Life time (h)              | 50000h L80B10 |
| IP                         | IP65          |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 80            |