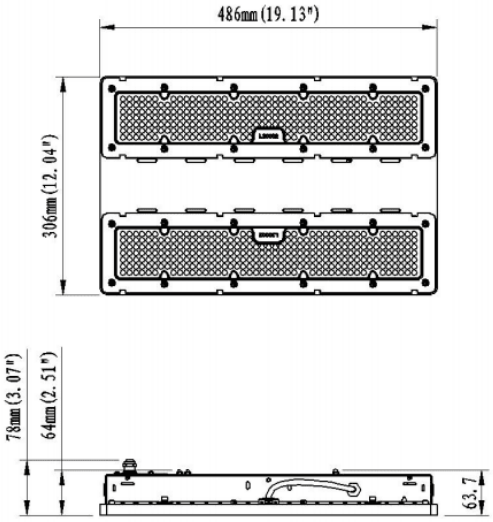


DRACO II LINEAR

Item code	**86.I020.1441.02**
Product type	**Indoor**
Category	**Industrial**
Family	**DRACO II LINEAR**
Subfamily	**DRACO II LINEAR**
Pictograms	CRI 80 · Driver INCL. · 1-10V · 50000h L70B10

Dimensions	
Product dimensions (mm)	**486×306×78mm**

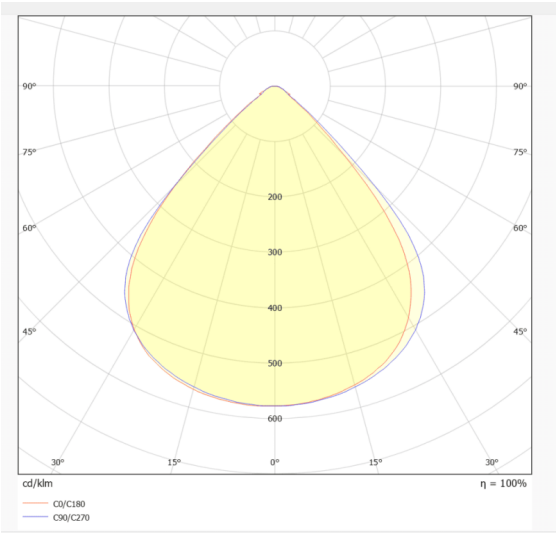
Scheme

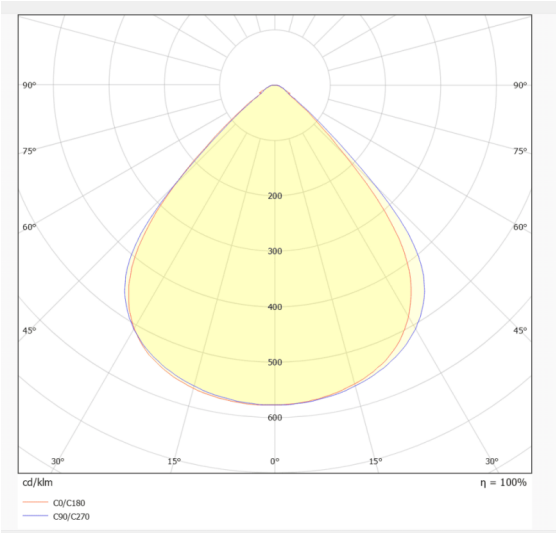


200W

Product	
Real power (W)	**200 (Selectable 120,160,200)**
Real luminous flux (Lm)	**36000**
Luminous efficiency (Lm/W)	**180**
Beam angle (º)	**90**
Life time (h)	**50000h L70B10**
IP	**40**
U. G. R	**22**
Control gear	**1-10V Dimmable**
Colour temperature (K)	**4000**
Colour consistency (SDCM)	**SDCM5**
CRI	**80**
IK	**08**

Photometry


90°
75°
60°
45°
200
300
400
500
600
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270


90°
75°
60°
45°
200
300
400
500
600
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270