



**LED Ceiling light**
**DOR/DOS**






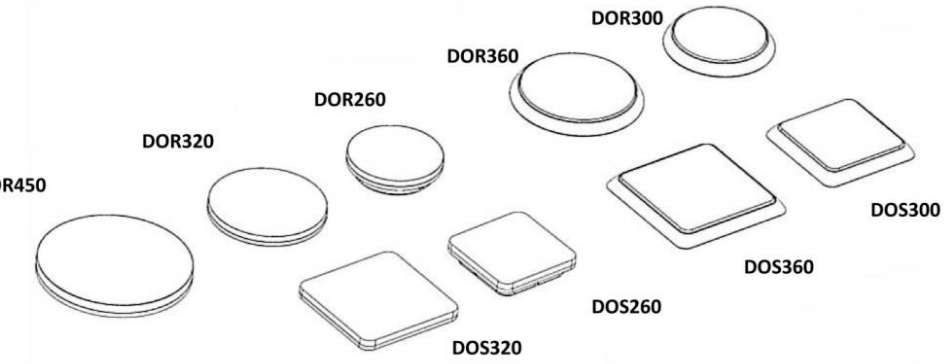

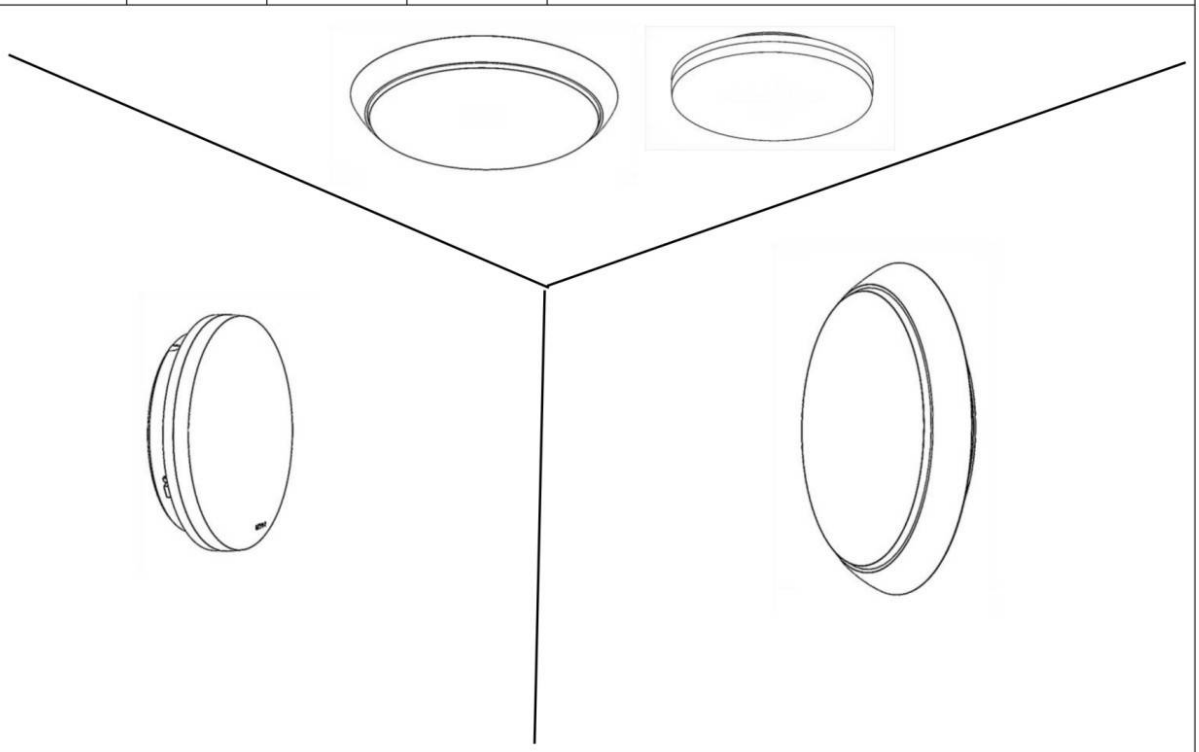

**WARNING:**





Check that the power is off before conducting any maintenance and assembly work




Caution,danger of electric shock



The installation and commissioning of the luminaire as well as any modification to the luminaire may only be performed by authorized personnel (qualified electrician).

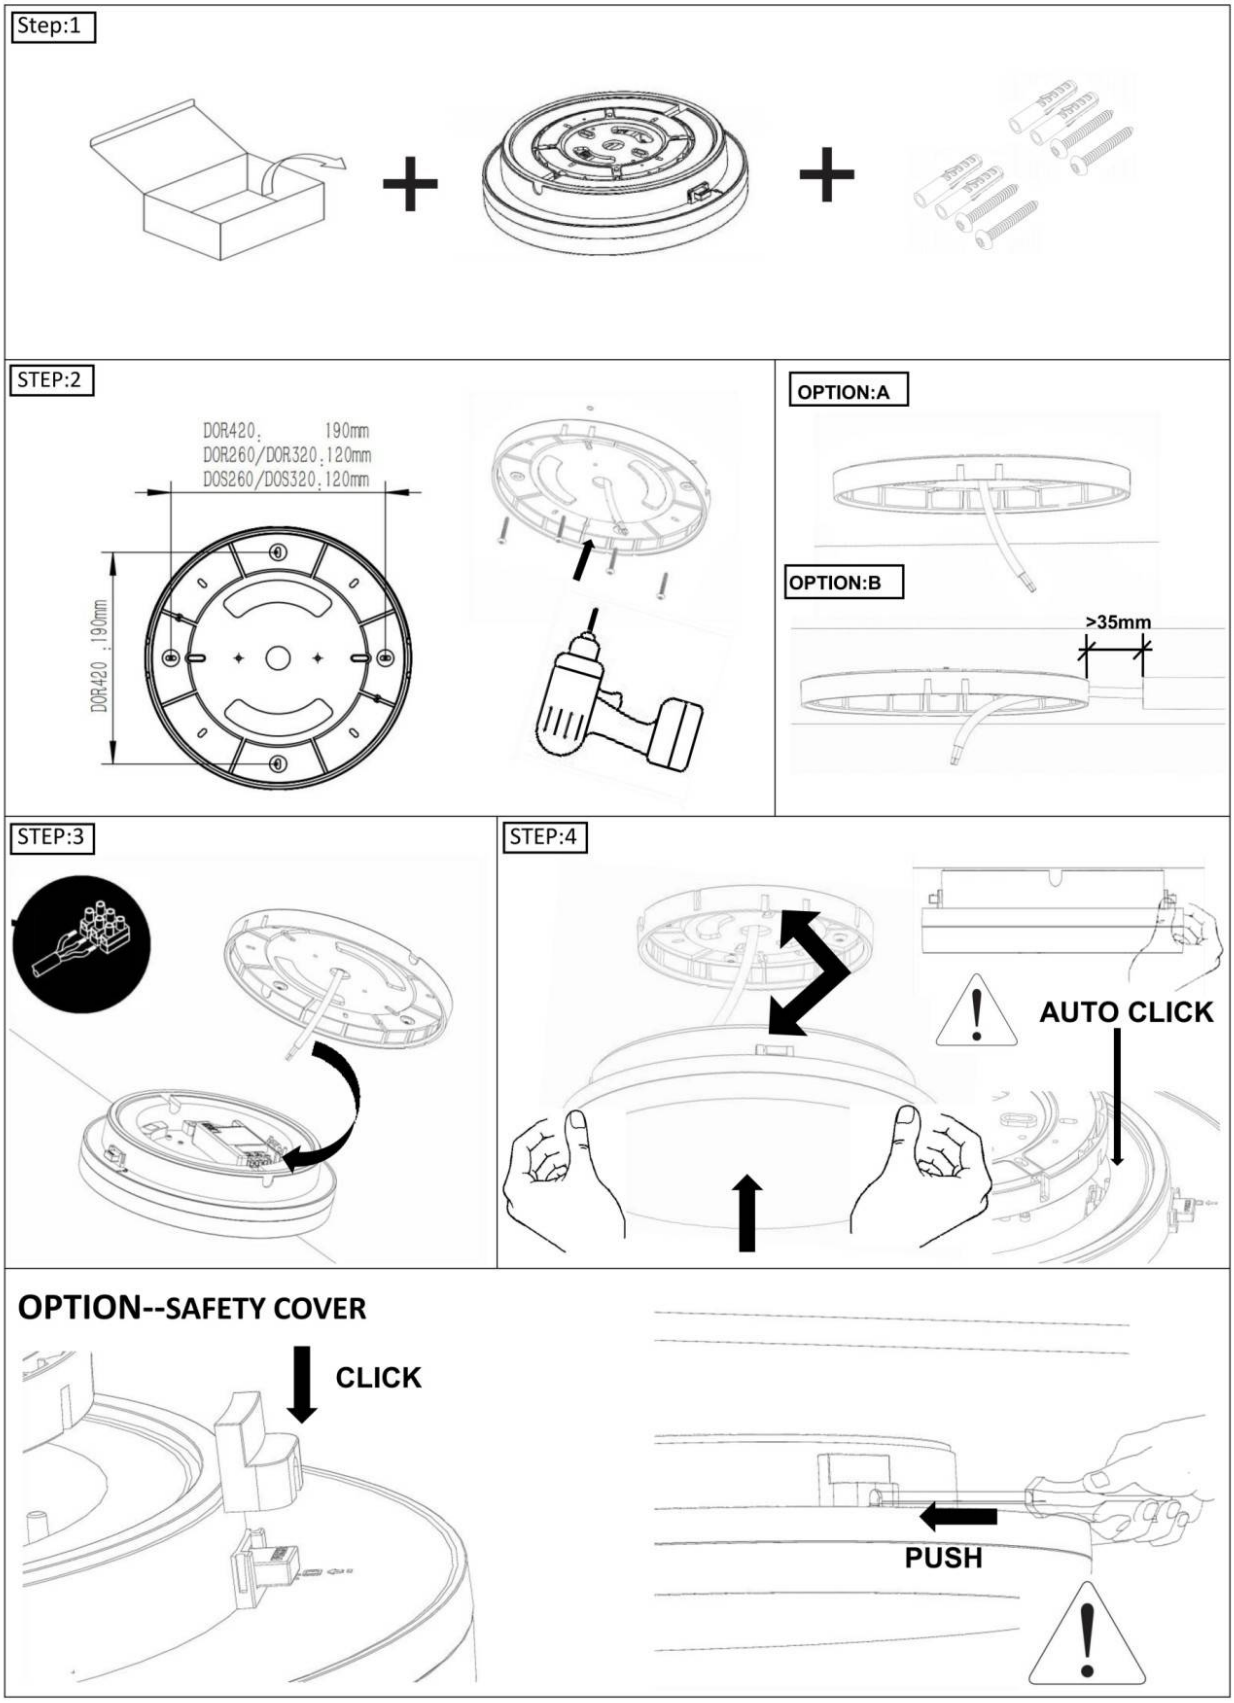
Step:1
STEP:2
DOR420: 190mm
DOR260/DOR320: 120mm
DOS260/DOS320: 120mm
DOR420: 190mm
OPTION:A
OPTION:B
>35mm
STEP:3
STEP:4
AUTO CLICK
OPTION--SAFETY COVER
CLICK
PUSH


## I. WIRING DIAGRAMS: CCT+POWER/SWITCHABLE

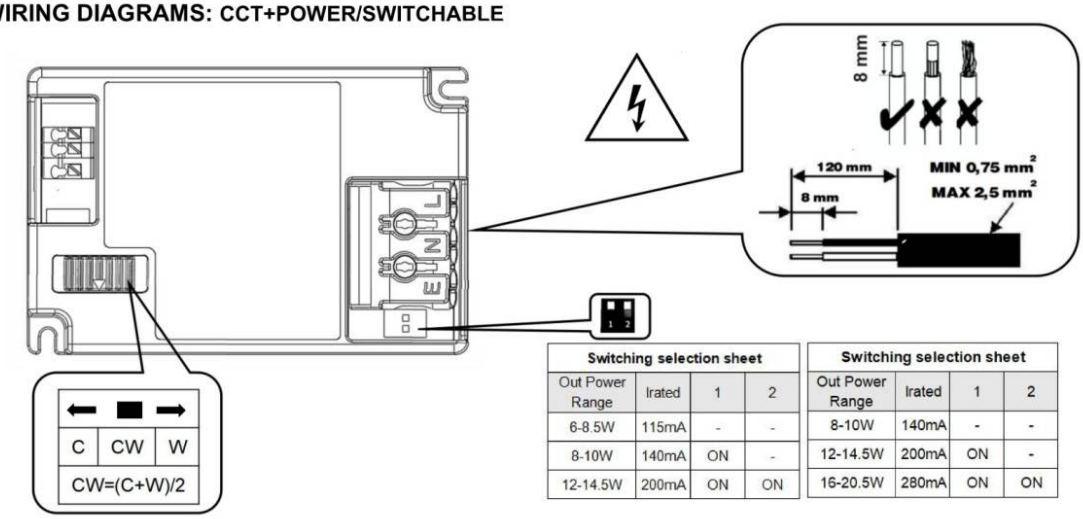


| Switching selection sheet | | | |
|---|---|---|---|
| Out Power Range | Irated | 1 | 2 |
| 6-8.5W | 115mA | - | - |
| 8-10W | 140mA | ON | - |
| 12-14.5W | 200mA | ON | ON |

| Switching selection sheet | | | |
|---|---|---|---|
| Out Power Range | Irated | 1 | 2 |
| 8-10W | 140mA | - | - |
| 12-14.5W | 200mA | ON | - |
| 16-20.5W | 280mA | ON | ON |


## II. WIRING DIAGRAMS: CCT+POWER/SWITCHABLE+SENSOR/EM2

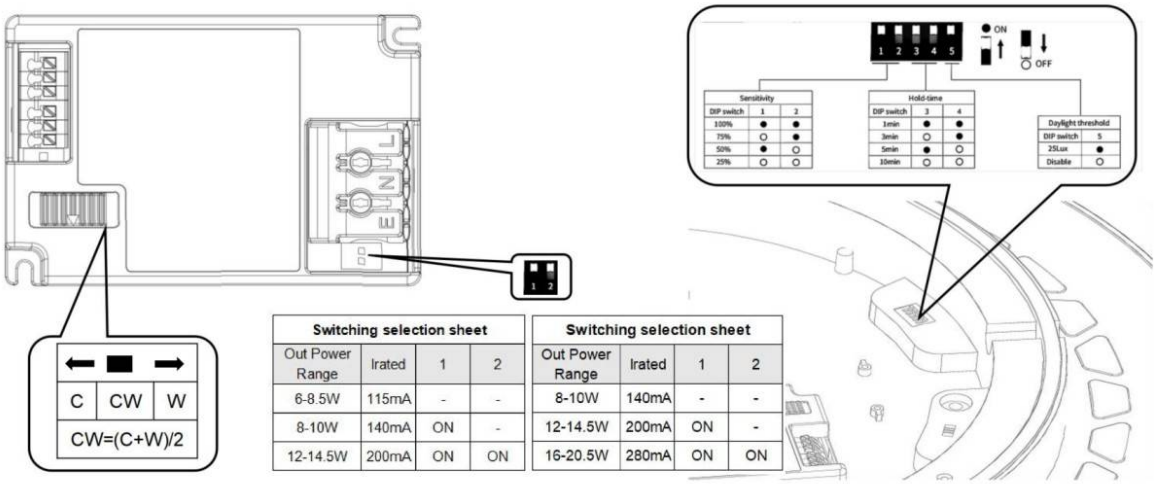


| Switching selection sheet | | | |
|---|---|---|---|
| Out Power Range | Irated | 1 | 2 |
| 6-8.5W | 115mA | - | - |
| 8-10W | 140mA | ON | - |
| 12-14.5W | 200mA | ON | ON |

| Switching selection sheet | | | |
|---|---|---|---|
| Out Power Range | Irated | 1 | 2 |
| 8-10W | 140mA | - | - |
| 12-14.5W | 200mA | ON | - |
| 16-20.5W | 280mA | ON | ON |

## III. WIRING DIAGRAMS: CCT+DALI (TCI DT6）

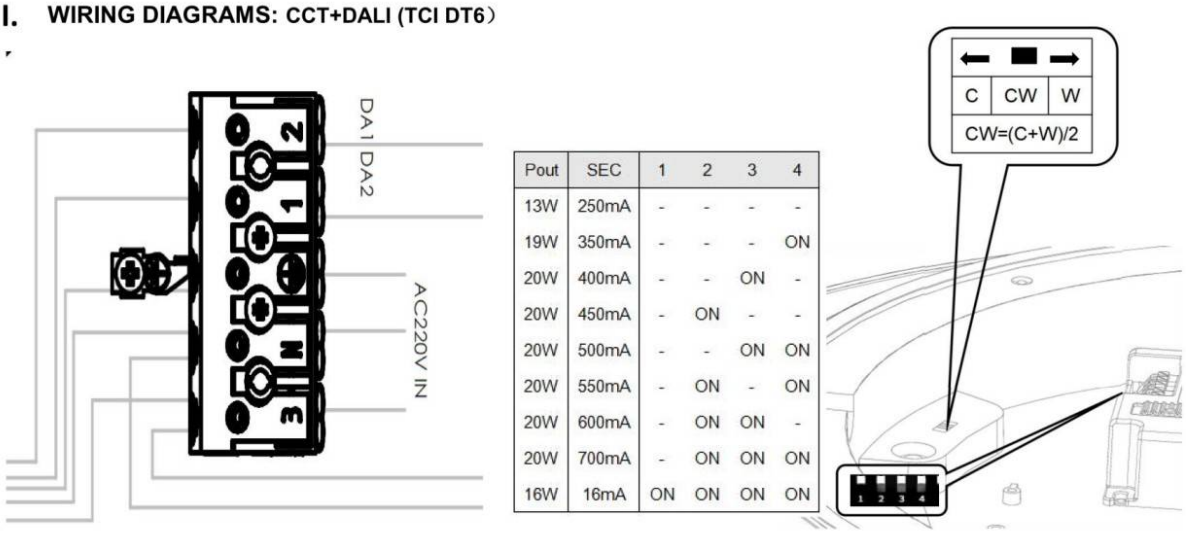


| Pout | SEC | 1 | 2 | 3 | 4 |
|---|---|---|---|---|---|
| 13W | 250mA | - | - | - | - |
| 19W | 350mA | - | - | - | ON |
| 20W | 400mA | - | - | ON | - |
| 20W | 450mA | - | ON | - | - |
| 20W | 500mA | - | - | ON | ON |
| 20W | 550mA | - | ON | - | ON |
| 20W | 600mA | - | ON | ON | - |
| 20W | 700mA | - | ON | ON | ON |
| 16W | 16mA | ON | ON | ON | ON |