




C-SLINE

| | | | | | |
|--------------|---|--|--|--|--|
| Item code | 86.L004.6301.03 | | | | |
| Product type | Indoor | | | | |
| Category | Linear Systems | | | | |
| Family | C-SLINE | | | | |
| Pictograms | <div><div></div><div>220 240 V</div><div>CRI 80</div><div>CE</div><div>Driver INCL.</div></div> <div><div>On Off</div><div> 1-10V</div><div>IP 20</div><div>50000h L80B10</div></div> | | | | |

Dimensions

Product dimensions (mm) $\Phi 3000\text{mm} \times \text{W}50\text{mm} \times \text{H}70\text{mm}$

Scheme

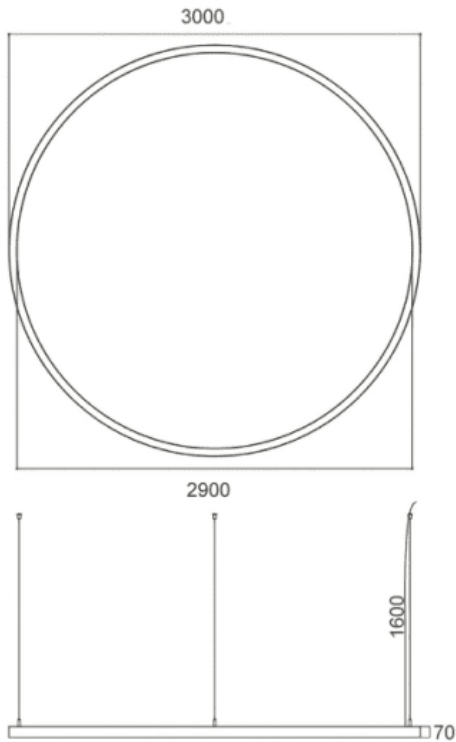

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 185 |
| Real luminous flux (Lm) | 15725 |
| Luminous efficiency (Lm/W) | 85 |
| Beam angle (°) | 108 |
| Life time (h) | 50000h L80B10 |
| IP | 40 |
| U. G. R | 22 |
| Control gear | ON-OFF |
| Average life time (h) | 50000h L80B10 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |