




C-SSLINE

|              |   |  |  |  |  |
|--------------|---|--|--|--|--|
| Item code    | 86.L009.2301.03   |  |  |  |  |
| Product type | Indoor  |  |  |  |  |
| Category     | Linear Systems  |  |  |  |  |
| Family       | C-SSLINE  |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div><br/>1-10V</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |  |  |  |  |

Dimensions

Product dimensions (mm)     $\varnothing$ 2500mm×W54mm×H35mm

Scheme

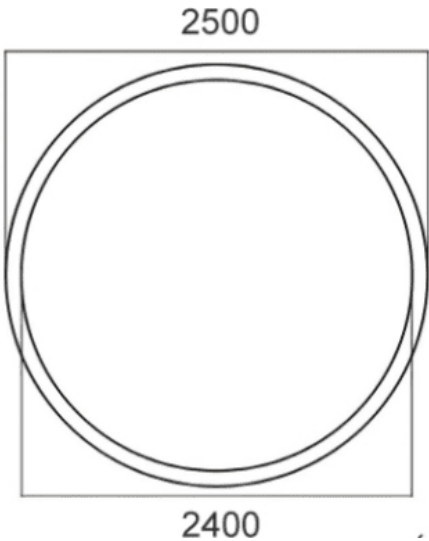

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 113           |
| Real luminous flux (Lm)    | 9000          |
| Luminous efficiency (Lm/W) | 80            |
| Beam angle (°)             | 108           |
| Life time (h)              | 50000h L80B10 |
| IP                         | 40            |
| U. G. R                    | 22            |
| Control gear               | ON-OFF        |
| Average life time (h)      | 50000h L80B10 |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |