




C-SSLINE

| | |
|--------------|-----------------|
| Item code | 86.L009.3301.02 |
| Product type | Indoor |
| Category | Linear Systems |
| Family | C-SSLINE |

| | | | | | |
|------------|-----------|--------------|-----------|------------------|-----------------|
| Pictograms | | 220 240 V | CRI 80 | CE | Driver INCL. |
| | On Off | 1-10V | IP 20 | 50000h L80B10 | |

| | |
|-------------------------|---------------------|
| Dimensions | |
| Product dimensions (mm) | ø3000mm×W54mm×H35mm |

| | |
|--------|--|
| Scheme | |
|--------|--|

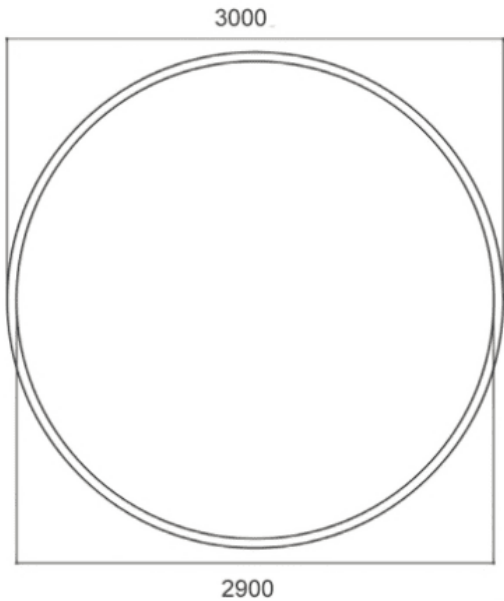

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 135 |
| Real luminous flux (Lm) | 12150 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 108 |
| Life time (h) | 50000h L80B10 |
| IP | 40 |
| U. G. R | 22 |
| Control gear | ON-OFF |
| Average life time (h) | 50000h L80B10 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |