




TUBULAR-S A

| | | | | |
|--------------|--|--|--|--|
| Item code | 86.SD05.1423.02 | | | |
| Product type | Indoor | | | |
| Category | Surface Downlights | | | |
| Family | TUBULAR-S A | | | |
| Pictograms | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> | | | |

| | |
|-------------------------|-------------|
| Dimensions | |
| Product dimensions (mm) | Ø117X115 mm |
| Scheme | |

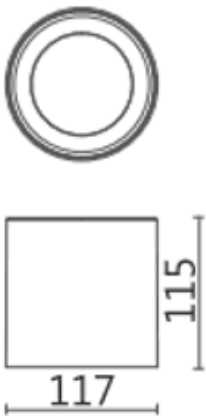

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 15 |
| Real luminous flux (Lm) | 1250 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 24 |
| Life time (h) | 50000h L80B10 |
| IP | IP20 |
| Control gear | DALI |
| Average life time (h) | 40 |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |