




TUBULAR-S A

|              |  |  |  |  |
|--------------|--|--|--|--|
| Item code    | 86.SD05.2333.01  |  |  |  |
| Product type | Indoor   |  |  |  |
| Category     | Surface Downlights   |  |  |  |
| Family       | TUBULAR-S A  |  |  |  |
| Pictograms   | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |  |  |  |

|                         |             |
|-------------------------|-------------|
| Dimensions              |             |
| Product dimensions (mm) | Ø169X139 mm |

|        |  |
|--------|--|
| Scheme |  |
|--------|--|

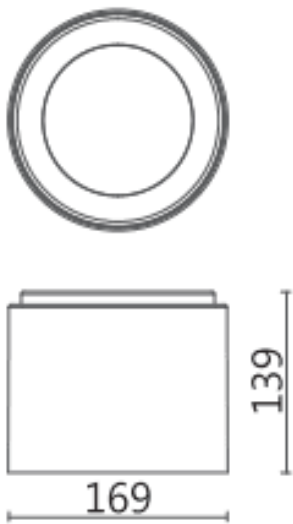

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 25            |
| Real luminous flux (Lm)    | 2000          |
| Luminous efficiency (Lm/W) | 80            |
| Beam angle (°)             | 50            |
| Life time (h)              | 50000h L80B10 |
| IP                         | IP20          |
| Control gear               | DALI          |
| Average life time (h)      | 30            |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |