

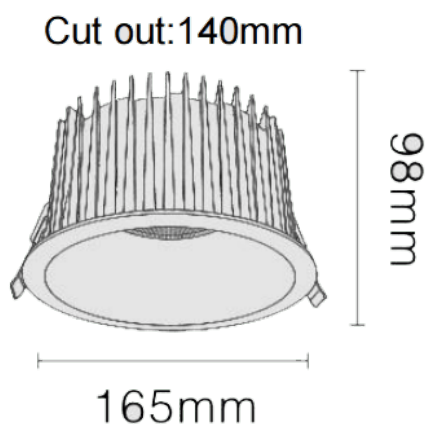


**NEW PERFORM-RA Smart**

|              |   |  |  |  |  |
|--------------|---|--|--|--|--|
| Item code    | 86.D122.4449.B1   |  |  |  |  |
| Product type | Indoor  |  |  |  |  |
| Category     | Downlights  |  |  |  |  |
| Family       | NEW PERFORM   |  |  |  |  |
| Subfamily    | NEW PERFORM-RA Smart  |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |  |  |  |  |

**Dimensions****Product dimensions (mm)**      **ø165\*H98mm****Scheme**

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 35                 |
| Real luminous flux (Lm)    | 3500               |
| Luminous efficiency (Lm/W) | 100                |
| Beam angle (°)             | 80                 |
| Life time (h)              | 50000 h L80B10     |
| IP                         | 20                 |
| U. G. R                    | 19                 |
| Control gear               | DALI Casambi ready |
| Colour temperature (K)     | 4000               |
| Colour consistency (SDCM)  | SDCM3              |
| CRI                        | 80                 |