




NEW PERFORM-RB Smart

|              |                                                                                                                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.D123.5449.C1                                                                                                                                                                                         |
| Product type | Indoor                                                                                                                                                                                                  |
| Category     | Downlights                                                                                                                                                                                              |
| Family       | NEW PERFORM                                                                                                                                                                                             |
| Subfamily    | NEW PERFORM-RB Smart                                                                                                                                                                                    |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

Dimensions

Product dimensions (mm)      ø115\*H71mm

Scheme

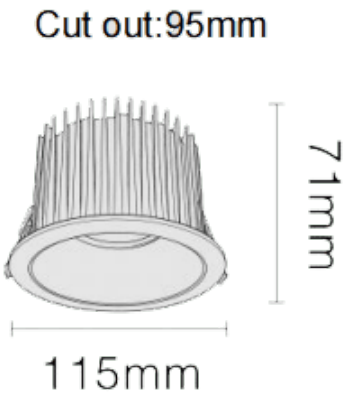

Product

|                            |                    |
|----------------------------|--------------------|
| Real power (W)             | 25                 |
| Real luminous flux (Lm)    | 2500               |
| Luminous efficiency (Lm/W) | 100                |
| Beam angle (°)             | 80                 |
| Life time (h)              | 50000 h L80B10     |
| IP                         | 20                 |
| U. G. R                    | 19                 |
| Control gear               | DALI Casambi ready |
| Colour temperature (K)     | 4000               |
| Colour consistency (SDCM)  | SDCM3              |
| CRI                        | 80                 |