




NEW PERFORM-RC Smart

|              |   |
|--------------|---|
| Item code    | 86.D124.3349.E1   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | NEW PERFORM   |
| Subfamily    | NEW PERFORM-RC Smart  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div>DALI</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

Dimensions

Product dimensions (mm)                   ø165\*H96mm

Scheme

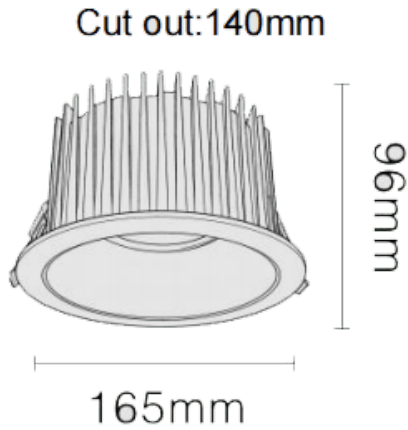

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 35                 |
| Real luminous flux (Lm)    | 3500               |
| Luminous efficiency (Lm/W) | 100                |
| Beam angle (°)             | 80                 |
| Life time (h)              | 50000 h L80B10     |
| IP                         | 20                 |
| U. G. R                    | <19                |
| Control gear               | DALI Casambi ready |
| Colour temperature (K)     | 3000               |
| Colour consistency (SDCM)  | SDCM<3             |
| CRI                        | 80                 |