




NEW PERFORM-S

|              |   |
|--------------|---|
| Item code    | 86.D125.1413.A1   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | NEW PERFORM   |
| Subfamily    | NEW PERFORM-S   |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div><div>On<br/>Off</div><div>DALI</div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

|                         |             |
|-------------------------|-------------|
| Dimensions              |             |
| Product dimensions (mm) | 95*95*H61mm |

|        |  |
|--------|--|
| Scheme |  |
|--------|--|

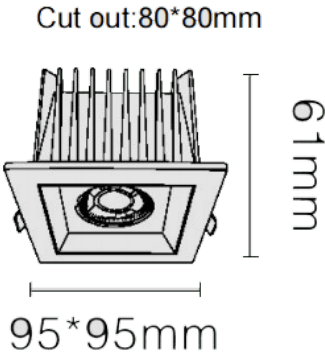

|                            |                |
|----------------------------|----------------|
| Product                    |                |
| Real power (W)             | 15             |
| Real luminous flux (Lm)    | 1500           |
| Luminous efficiency (Lm/W) | 100            |
| Beam angle (°)             | 24             |
| Life time (h)              | 50000 h L80B10 |
| IP                         | 20             |
| U. G. R                    | <19            |
| Control gear               | DALI           |
| Colour temperature (K)     | 4000           |
| Colour consistency (SDCM)  | SDCM<3         |
| CRI                        | 80             |