




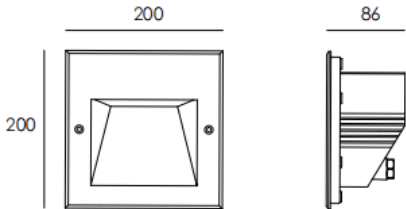
WINDOW S

|              |  |
|--------------|--|
| Item code    | 86.OR01.6331.03  |
| Product type | Outdoor  |
| Category     | Recessed Wall & Ceiling  |
| Family       | WINDOW   |
| Subfamily    | WINDOW S   |
| Pictograms   | <div><div></div><div><div>220<br/>240 V</div><div> 850°</div><div><div>CRI<br/>90</div><div></div></div></div><div><div>On<br/>Off</div><div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div></div></div> |

Dimensions

Product dimensions (mm) 200x200x86mm

Scheme



cut out:188\*188\*107mm

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 18            |
| Real luminous flux (Lm)    | 873           |
| Luminous efficiency (Lm/W) | 45.95         |
| Beam angle (°)             | assymmetric   |
| Life time (h)              | 50000h L80B10 |
| IP                         | IP65          |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 90            |
| IK                         | IK05          |